



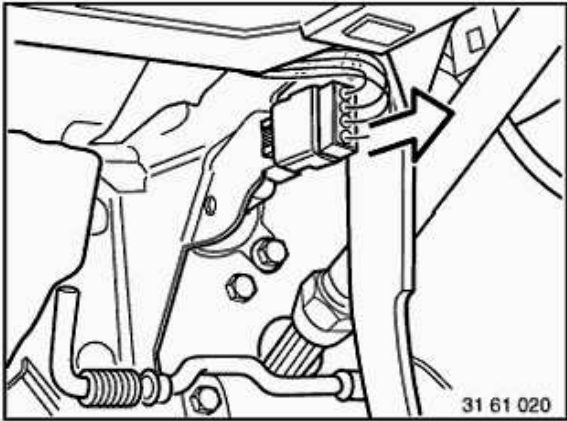


Removing instrument panelling at bottom left,
refer to 61 31 016
Disconnect connector.

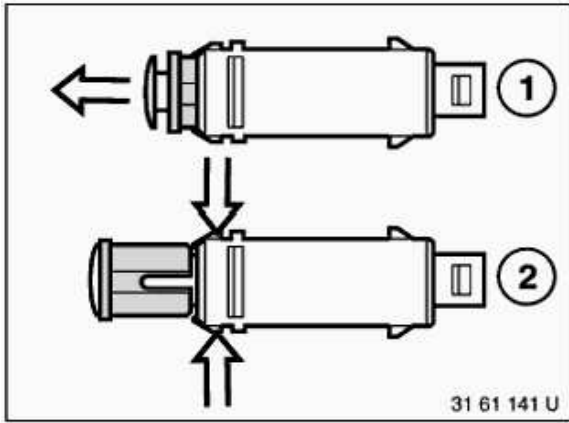

Depress brake pedal as far as possible.

- 1: Pull tappet and sleeve forward completely.
- 2: Press together clips and pull back switch.

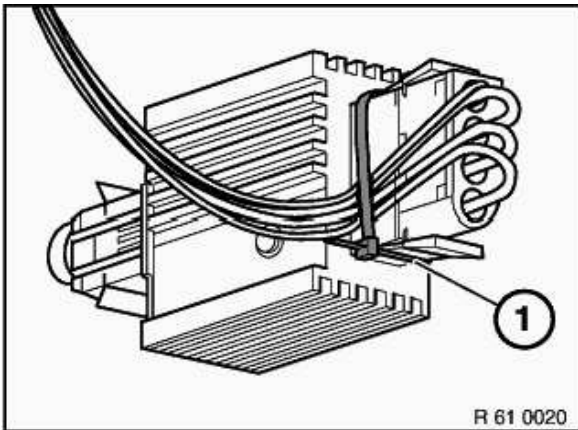

Installation note:

Adjustment is made automatically after installation.


Slowly release pedal to neutral position.

Tie back lead with cable clip (1).

Caution!

Adjustment of the switch can be changed if brake pedal
springs back.


Check function.

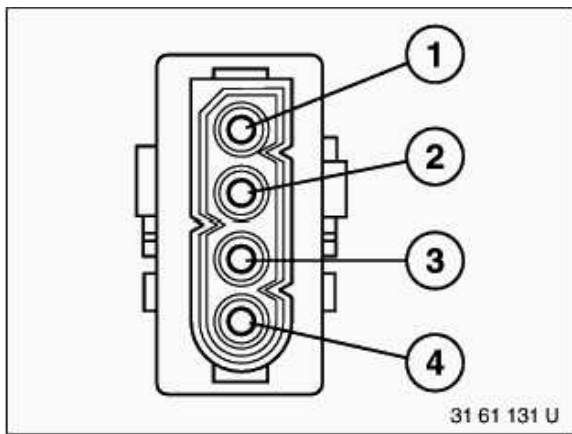

Connector assignment for brake-light switch and brake-light-test switch:

1 and 2 brake light switches

3 and 4 brake light test switches

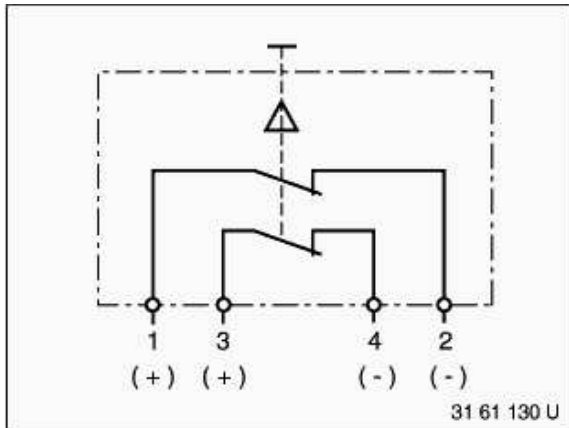

Schematics of brake-light-test switch and brake-light switch.