

Pneumatics Fastening System

Tools and Accessories



Section Guide

Tools

Framing Nailers	29
Roofing Nailers.....	29
Finishing Nailers	30
Compressors	31-32

Accessories

Rafter Hook	32
O Ring Kits	32
Tool Oils	32

Pneumatic Fastening System


FULL FORCE TECHNOLOGY

Bosch pneumatic fastening tools are engineered to direct 100% of their energy to the fastener by eliminating wasted power and space. Full Force Technology means the user has ample power to consistently sink nails in all types of engineered lumber as well as standard wood boards and beams.



20% SMALLER*

Tool Size*



BOSCH
927 cm³



Brand A
1377 cm³




Brand B
1321 cm³



Brand C
1239 cm³

10% MORE POWER*

Fastening Force*

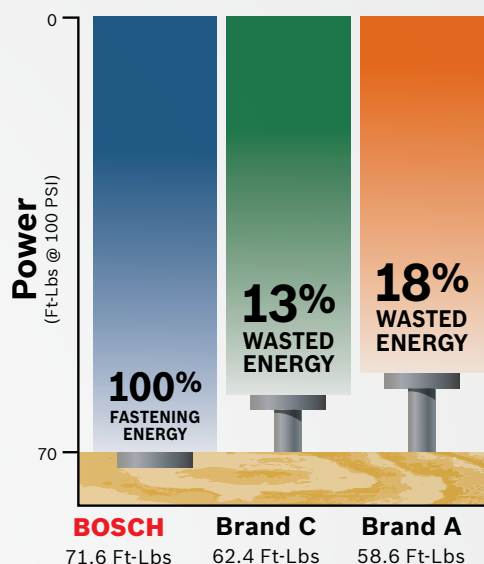

Guaranteed Best **Power** to **Size** Ratio in the Industry!

POPULAR SCIENCE 2009 Best of What's New-Grand Award



Each year, thousands of new products and innovations are reviewed. Out of 100 winners across 11 categories, Bosch Pneumatic nail guns were honored with the Grand Award for taking a significant step forward in its category.

*Test conducted at Robert Bosch Tool Corp. using new Bostitch F21PL, Hitachi NR83A2, Paslode F350S, Bosch SN350-20F, and Bosch SN350-34C tools. Tool size determined by measured internal volume and includes all air chambers of housing assembly. Power comparison using average kinetic energy calculated over operating pressure range and measured in foot pounds. Bostitch® is a registered trademark of The Stanley Works and/or its Affiliates. Hitachi® is a registered trademark of Hitachi, Ltd. and/or its affiliates in the United States and other countries. Paslode® is a registered trademark of Illinois Tool Works Company. These trademarks are being used without the permission of the trademark owners for comparison purpose only.



BOSCH

For more details visit
Boschtools.com



See pages 32 for
pneumatic fastening
tool accessories.

Pneumatic Fastening System

Framing/Roofing Nailers

29

Pneumatics
Fastening System

SN350-20F – Full Head Framing Nailer



JLC Innovative Products

NEW

- Quick Release Magazine - Easily remove jammed nails without disassembly of tool
- Metal Strike Plate - Designed for positioning lumber and to take job-site abuse
- In-line Self-cleaning Air Filter - Keeps debris away from the valve and o-rings, improving life of the tool
- Single Action Follower Lock Back - Simple motion for loading and unloading nails
- Tool-less Adjustable Depth of Drive - Adjust depth of drive on tool
- Tool-less Selectable Trigger - Easily switch between bump and sequential fire

Includes: Safety Glasses, No Mar Tip

SN350-34C – Clipped Head Framing Nailer



JLC Innovative Products

NEW

- Quick Release Magazine - Easily remove jammed nails without disassembly of tool
- Metal Strike Plate - Designed for positioning lumber and to take job-site abuse
- Dry Fire Lock-out - Avoids damage to work materials and internal components by preventing blank firing
- In-line Self-Cleaning Air Filter - Keeps debris away from the valve and o-rings, improving life of the tool
- Single Action Follower Lock Back - Simple motion for loading and unloading nails
- Tool-less Adjustable Depth of Drive - Adjust depth of drive on tool
- Tool-less Selectable Trigger - Easily switch between bump and sequential fire

Includes: Safety Glasses, No Mar Tip

RN175 – Roofing Coil Nailer



Toolmonger.com Top 5

NEW

- Bosch Armor - Protects from job-site abuse and abrasive shingles
- Single Action Side Load - One Step Nail Re-load
- In-line Self-Cleaning Air Filter - Keeps debris away from the valve and o-rings, improving life of the tool
- Dry Fire Lock-out - Avoids damage to work materials and internal components by preventing blank firing
- Tool-less Adjustable Depth of Drive - Adjust depth of drive on tool
- Tool-less Adjustable Shingle Guide - Enables user to change exposure dimension for different shingle types

Includes: Safety Glasses

Specifications

Model#	Magazine Angle	Magazine Loading	Operating Range	Air Inlet	Dimensions	Weight (lbs.)	Nail Length	Nail Diameter	Nail Shank	Magazine Capacity
SN350-20F	20°	Top	60 - 120 psi	3/8"	21.4" L x 6.7" W x 13.6" H	8.4	2" - 3-1/2"	.113 - .148	Smooth, Ring, Screw	73 Nails
SN350-34C	30°	Top	60 - 120 psi	3/8"	21.4" L x 6.7" W x 13.6" H	8.4	2" - 3-1/2"	.113 - .148	Smooth, Ring, Screw	99 Nails
RN175	15°	Side	75 - 120 psi	1/4"	10" L x 3.25" W x 10" H	5.5	3/4" - 1-3/4"	.120	Smooth	100 Nails

Pneumatic Fastening System

Finishing Nailers

FNA250-15 – 15 Ga Angled Finish Nailer



NEW



- Dry Fire Lock-out - Avoids damage to work piece and internal components by preventing blank firing
- Tool-less Quick Clear - Easily remove jammed nails
- In-line Self-cleaning Air Filter - Keeps debris away from the valve and o-rings, improving life of the tool
- Tool-less Adjustable Depth of Drive - Adjust depth of drive at the tool
- Tool-less Adjustable Air Exhaust - Easily adjust direction of exhaust
- Slim Body - Better line of sight. Better control
- Tool-less Selectable Trigger - Easily switch operation between bump and sequential fire

Includes: Safety Glasses, No Mar Tip, Carrying Case

FNS250-16 – 16 Ga Straight Finish Nailer



NEW



- Dry Fire Lock-out - Avoids damage to work piece and internal components by preventing blank firing
- Tool-less Quick Clear - Easily remove jammed nails
- In-line Self-cleaning Air Filter - Keeps debris away from the valve and o-rings, improving life of the tool
- Tool-less Adjustable Depth of Drive - Adjust depth of drive at the tool
- Tool-less Adjustable Air Exhaust - Easily adjust direction of exhaust
- Slim Body - Better line of sight. Better control
- Tool-less Selectable Trigger - Easily switch operation between bump and sequential fire

Includes: Safety Glasses, No Mar Tip, Carrying Case

BNS200-18 – 18 Ga Brad Nailer



NEW



- Dry Fire Lock-out - Avoids damage to work piece and internal components by preventing blank firing
- Tool-less Quick Clear - Easily remove jammed nails
- In-line Self-cleaning Air Filter - Keeps debris away from the valve and o-rings, improving life of the tool
- Tool-less Adjustable Depth of Drive - Adjust depth of drive at the tool
- Tool-less Adjustable Air Exhaust - Easily adjust direction of exhaust
- Slim Body - Better line of sight. Better control
- Tool-less Selectable Trigger - Easily switch operation between bump and sequential fire

Includes: Safety Glasses, No Mar Tip, Carrying Case

STN150-18 – 1/4" Narrow Crown Stapler



NEW



- Dry Fire Lock-out - Avoids damage to work piece and internal components by preventing blank firing
- Tool-less Quick Clear - Easily remove jammed nails
- In-line Self-cleaning Air Filter - Keeps debris away from the valve and o-rings, improving life of the tool
- Tool-less Adjustable Depth of Drive - Adjust depth of drive at the tool
- Tool-less Adjustable Air Exhaust - Easily adjust direction of exhaust
- Slim Body - Better line of sight. Better control
- Tool-less Selectable Trigger - Easily switch operation between bump and sequential fire

Includes: Safety Glasses, No Mar Tip, Carrying Case

Specifications

Model#	Magazine Angle	Magazine Loading	Operating Range	Air Inlet	Dimensions	Weight (lbs.)	Nail Length	Nail Diameter	Nail Shank	Magazine Capacity
FNA250-15	34°	Rear	60 - 120 psi	1/4"	11.75" L x 3.13" W x 10" H	4	1-1/4" - 2-1/2"	15 Gauge DA Style	Smooth	100 Nails
FNS250-16	Straight	Rear	60 - 120 psi	1/4"	10.25" L x 2.88" W x 9.94" H	3.5	1" - 2-1/2"	16 Gauge	Smooth	100 Nails
BNS200-18	Straight	Side	60 - 120 psi	1/4"	9" L x 2.25" W x 9.75" H	2.1	5/8" - 2"	18 Gauge	Smooth	100 Nails
STN150-18	Straight	Top	60 - 120 psi	1/4"	9" L x 2.25" W x 9.75" H	2.1	1/2" - 1-1/2"	18 Gauge	Smooth	100 Nails


BOSCH

For more details visit
Boschtools.com



See pages 32 for
pneumatic fastening
tool accessories.

Driving Productivity



2-Year Pump Warranty

Full warranty on any pump that fails within two years as long as basic regular maintenance is performed.



EZ Drain System

Easily use a single valve to drain both tanks as often as needed.



Durable

Roll cage protects the motor.

Easy to transport

Innovative vertical tank design improves balance and provides maximum maneuverability.

CET3-10 – Electric Hand Carry Compressor


NEW

- E-Z Drain - One ball valve drain located in control panel for simultaneous draining of both tanks
- Quiet, 4-Pole Induction Motor - Provides dBA of 72 to lessen the distraction while working in close proximity to compressor
- Vertically Angled Tanks - Enables better center of gravity for easy transport throughout jobsite
- Roll Cage - For maximum durability and protection from jobsite conditions
- Recessed Control Panel - All gauges, regulator, couplers and drain valve are located in easy to access location and are protected from jobsite conditions
- Contractor Grade Oil-lubed Pump - Extends product life for extra durability

CET4-20(W) – Electric Hand Carry Compressor (with Wheels)



CET4-20



CET4-20W

NEW

- E-Z Drain - One ball valve drain located in control panel for simultaneous draining of both tanks
- Vertically Angled Tanks - Enables better center of gravity for easy transport throughout jobsite
- Roll Cage - For maximum durability and protection from jobsite conditions
- 2-Pole Induction Motor - Provides dBA of 80 to lessen the distraction while working in close proximity to compressor
- Recessed Control Panel - All gauges, regulator, couplers and drain valve are located in easy to reach position and are protected from jobsite conditions
- Contractor Grade Oil-lubed Pump - Extends product life for extra durability

Specifications

Model#	Tank Capacity	HP	CFM @ 100psi	Recovery Time	RPM	Dimensions	Weight (lbs.)
CET3-10	3 gallons	1	2.6	14 sec.	1,700	16" L x 17" W x 16.25" H	57.3
CET4-20(W)	4 gallons	2 (2)	4.2 (4.9)	12 sec. (10 sec.)	3,400	16.25" L x 17.75" W x 19.75" H (22" L x 21.5" W x 19.75" H with handle down)	72.7 (84.9)

Pneumatic Fastening System

Compressors and Accessories

CET8-15W – Electric Wheelbarrow Compressor


NEW

- E-Z Drain - One ball valve drain located in control panel for simultaneous draining of both tanks
- Easy Load/Unload - Unique Handle Design allows for easy loading into back of truck and better balance when moving compressor throughout jobsite
- Cold Start Valve - Prevents compressor from blowing a fuse in cold weather conditions
- Cast Iron, Contractor Grade Oil-Lubed Pump - High durability and low maintenance for extended product life
- Angled Control Panel - All gauges, regulator, couplers, safety valve and drain valve are located in easy to access location
- 2-Year Pump Warranty - Full warranty on any pump that fails within two years as long as basic regular maintenance is performed

CGT8-65W – Gas Wheelbarrow Compressor


NEW

- E-Z Drain - One ball valve drain located in control panel for simultaneous draining of both tanks
- Easy Load/Unload - Unique Handle Design allows for easy loading into back of truck and better balance when moving compressor throughout jobsite
- Cold Start Valve - Provides easy start in cold weather conditions
- Cast Iron, Contractor Grade Oil-Lubed Pump - High durability and low maintenance for extended product life
- Angled Control Panel - All gauges, regulator, couplers, safety valve and drain valve are located in easy to access location
- 2-Year Pump Warranty - Full warranty on any pump that fails within two years as long as basic regular maintenance is performed

Accessories

O Ring Kits **NEW**

Item #	Description
SN350-OR	For use with SN350-20F and SN350-34C
RN75-OR	For use with RN175
FNA250-OR	For use with FNA250-15
FNS250-OR	For use with FNS250-16

- Includes: All O-Rings and Plug

Item #	Description
BNS200-OR	For use with BNS200-18 and STN150-18

- Includes: All O-Rings

SN350-RH Rafter Hook, Framing Nailer **NEW**

- Easily hang tool from rafters for increased productivity
- Retractable hook to move tool out of the way while not in use
- Compatible with Bosch SN350-20F and SN350-34C framing nailers



PNO-S Tool Oil - Standard Weather **NEW**

- Specifically formulated to withstand the stresses of pneumatic operation
- Optimal results when used in temperatures above 32°F/0°C.
- Add a few drops of Bosch pneumatic tool oil to the air tool every day before use
- Contents: 17 fluid ounces

PNO-W Tool Oil - Cold Weather **NEW**

- Specifically formulated to withstand the stresses of pneumatic operation
- Optimal results when used in temperatures below 32°F/0°C
- Add a few drops of Bosch pneumatic tool oil to the air tool every day before use
- Contents: 17 fluid ounces

Specifications

Model#	Tank Capacity	HP	CFM @ 100psi	Engine	Recovery Time	RPM	Dimensions	Weight (lbs.)
CET8-15W	8 gallons	1.5	6.5	N/A	17 sec.	1,725	48.5" L x 18.5" W x 26" H	175
CGT8-65W	8 gallons	6.5	13.1	Honda GX200 OHV	14 sec.	3,200	48.5" L x 18.5" W x 26" H	175


BOSCH

For more details visit
Boschtools.com