

Drills and Fastening

Tools and Accessories



Section Guide

Tools

Drywall Screwguns	180-181
Drills	182-183
Right-Angle Drill	183

Accessories

Wood Drilling	185-187
Metal Drilling	188-194
Hole Saws	195-202
Screwdriver Bits	203-214

Drills and Fastening


Drywall Screwguns

Drywall Screwguns. Feel the Difference. See the Results.




Compact Design

Provides better tool balance and improved comfort when driving screws all day long

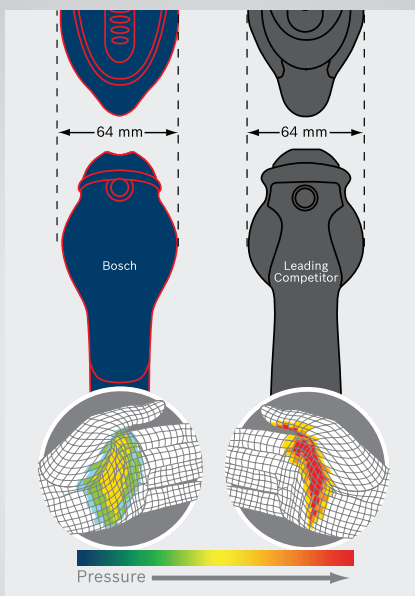

Ergonomic Grip

Contoured grip is designed to maximize comfort and minimize fatigue with evenly distributed pressure

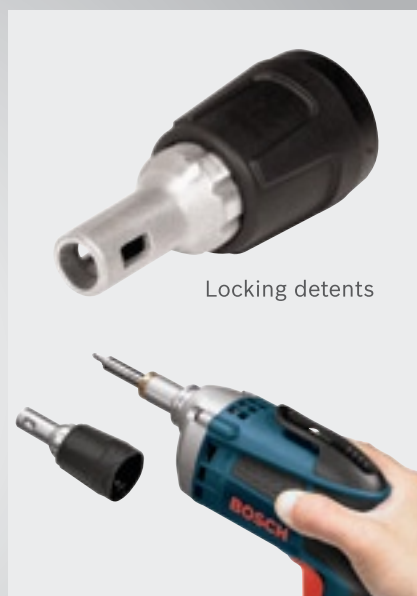

Posi-Lok™ Nose Piece

Unique nose piece design is both easy to use and remove, and positively locks the depth setting when removed

SG45M(50/50G) – Drywall Screwgun (with 50' Twist Lock Cord/ 50' 3-Prong Cord)



- Compact Design - Increased comfort and control to drive screws all day
- Ergonomic Design - Contoured grip is designed to maximize comfort and minimize fatigue
- Posi-Lok™ Nose Piece Design (patent pending) - Retains depth setting when removed and eliminates time consuming depth readjustments
- 4,500 RPM - Provides the optimum speed for drywall installation and metal stud construction
- 101 in. lbs. of Torque - Best torque to weight ratio in its class
- One Hand Adjustable and Removable Nose Piece - Fast and easy adjustments whether working in a variety of materials or tight spaces
- Metal Gear Housing - For Maximum Jobsite Durability
- Unique Trigger Design - Improves user comfort for all day use
- Variable Speed Trigger with Forward-Reverse Lever - For increased control
- Belt Clip - Frees up hands for other important tasks

SG45M-50

Includes: 50 Ft. Cord with Twist Lock Plug

SG45M-50G is not double insulated

Includes: 50 Ft. Cord with 3-Prong Grounded Standard Plug

Specifications

Model#	Rating	Amperage	No Load RPM	Torque (in. lbs.)	Length (in.)	Weight (lbs.)
SG45M	120V	7.0	0-4,500	101	10.9"	2.95
SG45M-50	120V	7.0	0-4,500	101	10.9"	2.95
SG45M-50G	120V	7.0	0-4,500	101	10.9"	2.95



BOSCH

For more details visit
Boschtools.com



See pages 203-214 for
Drilling and Fastening
accessories.

SG45 – Drywall Screwgun



- Compact Design - Increased comfort and control to drive screws all day
- Ergonomic Design - Contoured grip is designed to maximize comfort and minimize fatigue
- Posi-Lok™ Nose Piece Design (patent pending) - Retains depth setting when removed and eliminates time consuming depth readjustments
- One Hand Adjustable and Removable Nose Piece - Fast and easy adjustments whether working in a variety of materials or tight spaces
- Plastic Gear Housing - Provides lightweight design
- Unique Trigger Design - Improves user comfort for all day use
- Variable Speed Trigger with Forward-Reverse Lever - For increased control

SG25M – High Torque Screwgun



- Compact Design - Increased comfort and control to drive screws all day
- Ergonomic Design - Contoured grip is designed to maximize comfort and minimize fatigue
- Posi-Lok™ Nose Piece Design (patent pending) - Retains depth setting when removed and eliminates time consuming depth readjustments
- One Hand Adjustable and Removable Nose Piece - Fast and easy adjustments whether working in a variety of materials or tight spaces
- Metal Gear Housing - For Maximum Jobsite Durability
- Unique Trigger Design - Improves user comfort for all day use
- Variable Speed Trigger with Forward-Reverse Lever - For increased control

SG25MT – TEK Screwgun



- Compact Design - Increased comfort and control to drive screws all day
 - Ergonomic Design - Contoured grip is designed to maximize comfort and minimize fatigue
 - Posi-Lok™ Nose Piece Design (patent pending) - Retains depth setting when removed and eliminates time consuming depth readjustments
 - One Hand Adjustable and Removable Nose Piece - Fast and easy adjustments whether working in a variety of materials or tight spaces
 - Metal Gear Housing - For Maximum Jobsite Durability
 - Unique Trigger Design - Improves user comfort for all day use
 - Variable Speed Trigger with Forward-Reverse Lever - For increased control
- Includes:** 1/4", 5/16", 3/8" Nut Drivers

1006VSR(K) – 3/8" Variable Corded Speed Drill



- 3/8" Jacobs Ratching Keyless Chuck - Holds accessories exceptionally well for minimal slipping
- Variable Speed 2-Finger Trigger with Forward-Reverse Lever - For increased comfort and control
- Improved Recessed Lock-On Button - Recessed in handle to prevent accidental lock-on
- Service Minder Brushes - Automatically stops tool when brush replacement is needed
- Durable Belt Clip - Frees up hands for other important tasks
- Soft Grip Handle Design - Adds comfort, reduces fatigue

1006VSRK Includes: Carrying Case

Specifications

Model#	Rating	Amperage	No Load RPM	Torque (in. lbs.)	Chuck	Length (in.)	Weights (lbs.)
1006VSR(K)	120V	6.3	0-2,600	177	3/8"	10.1"	3.4
SG45	120V	6.2	0-4,500	70	N/A	10.9"	2.6
SG25M	120V	7.0	0-2,500	179	N/A	11.2"	3.2
SG25MT	120V	7.0	0-2,500	179	N/A	11.2"	3.2



See pages 184-214 for
Drilling and Fastening
accessories.



Toll free: **877-BOSCH-99**



BOSCH

Drills and Fastening

Drills

1012VSR(1011VSR) – 3/8" High-Torque Drill



- One-handed Keyless Chuck
 - Variable Speed, Soft Grip Trigger, with Reversing Switch - For greater control
 - Two Finger Trigger Design and Lock-on Button - For ease of operation
 - Ergonomic Handle with Soft Grip - For increased comfort
 - Precision Cut Steel Gears
 - Magnesium Front Housing - For increased durability
 - 360° Auxiliary Handle with Optional Depth Gauge
- Includes:** Grounded Plug, Auxiliary Handle

1011VSR also features

- Heavy-duty Keyed Chuck

Includes: Chuck Key

1030VSR – 3/8" High-Speed Drill



- Heavy Duty, Keyed Chuck
 - Variable Speed, Soft Grip Trigger, with Reversing Switch - For greater control
 - Two Finger Trigger Design and Lock-on Button - For ease of operation
 - Ergonomic Handle with Soft Grip - For increased comfort
 - Precision Cut Steel Gears
 - Magnesium Front Housing - For increased durability
 - 360° Auxiliary Handle with Optional Depth Gauge
 - Extra Long 8' Rubber Cord with 3-prong Grounded Plug
- Includes:** Auxiliary Handle, Chuck Key

1169VSR – 1/2" Drill with Dual Torque Ranges



- 2 Speed Gear Box
 - Heavy Duty, Keyed Chuck
 - Trigger with Variable Speed Dial Trigger and Reversing Switch
 - Ergonomic Handle
 - Lock-on Button
- Includes:** Auxiliary Handle, Chuck Key

Drill Dust Extraction Compatibility Chart

1011VSR*, 1012VSR*, 1013VSR*, 1014VSR*, 1030VSR*, 1031VSR*, 1032VSR*, 1033VSR*, 1034VSR*, 1035VSR*, 1169VSR

1 618 190 006 Hood Only for extracting fine dust

1 618 190 009 Hood Only for extracting fine dust and other small debris

For use with bits up to 20mm/ 3/4" in diameter depending on tool's bit capacity

For use with bits up to 40mm/ 1-9/16" in diameter depending on tool's bit capacity

19mm Hose #

VAC001, VAC009†, VAC010†

35mm Hose #

VAC005, VAC006†, VAC007†, VAC008†, VAC021†

Adapter VAC002

Hose 1-1/4" or 1-1/2"

Vacuum Cleaner†



*When used with a dust extraction hood, this tool requires auxiliary handle 1612025024, which is sold separately and is different from this tool's standard equipment auxiliary handle.
†Competitor vacuum cleaners' ports won't accept VAC006-VAC021 locking hoses. They are only for use with Bosch 3931, 3931A and 3931A-PB vacs.

Specifications

Model#	Rating	Amperage	No Load RPM	Torque (in. lbs.)	Spindle Size	Maximum Hole Diameter in Wood (In.) - Paddle Bit	Maximum Hole Diameter in Wood (In.) - Self-Feed Bit	Maximum Hole Diameter in Wood (In.) - Hole Saw	Maximum Hole Diameter in Wood (In.) - Auger Bit	Maximum Hole Diameter in Steel (In.) - Twist Drill Bit	Maximum Hole Diameter in Steel (In.) - Hole Saw	Length (in.)	Weight (lbs.)
1012VSR(1011VSR)	120V	6.5	0-1,100	279	1/2"-20	1-1/2"	1"	2-1/2"	1"	3/8"	1-1/2"	9-7/8"	4.5 (4.6)
1030VSR	120V	7.5	0-2,100	215	1/2"-20	1"	Not Recommended, Drill is too fast	1-3/8"	Not Recommended, Drill is too fast	3/8"	1-3/8"	10"	4.8
1169VSR	120V	5.2	0-1,000/0-1,900	DUAL	1/2"-20	N/A	Not Recommended, Drill is too fast	1-1/2"	Not Recommended, Drill is too fast	3/8"	N/A	12-1/4"	4.6



BOSCH



For more details visit
Boschtools.com



See pages 184-214 for
Drilling and Fastening
accessories.

1013VSR – 1/2" High-Speed Drill



- Heavy Duty Keyed Chuck
- Variable Speed, Soft Grip Trigger, with Reversing Switch - For greater control
- Two Finger Trigger Design and Lock-on Button - For ease of operation
- Ergonomic Handle with Soft Grip - For increased comfort
- Precision Cut Steel Gears
- Magnesium Front Housing
- For Increased Durability - Provides maximum control in tough applications
- 360° Auxiliary Handle with Optional Depth Gauge
- Extra Long 8' Rubber Cord with 3-prong Grounded Plug

Includes: Auxiliary Handle, Chuck Key

1034VSR – 1/2" High-Torque Drill



- Heavy Duty, Keyed Chuck
- Variable Speed, Soft Grip Trigger, with Reversing Switch - For greater control
- Two Finger Trigger Design and Lock-on Button - For ease of operation
- Ergonomic Handle with Soft Grip - For increased comfort
- Precision Cut Steel Gears
- Magnesium Front Housing - For increased durability
- 360° Auxiliary Handle with Optional Depth Gauge
- Extra Long 8' Rubber Cord with 3-prong Grounded Plug

Includes: Auxiliary Handle, Chuck Key

1033VSR(1035VSR) – 1/2" High-Speed Drill



- Heavy Duty, Keyed Chuck
- Variable Speed, Soft Grip Trigger, with Reversing Switch - For greater control
- Two Finger Trigger Design and Lock-on Button - For ease of operation
- Ergonomic Handle with Soft Grip - For increased comfort
- Precision Cut Steel Gears
- Magnesium Front Housing - For increased durability
- 360° Auxiliary Handle with Optional Depth Gauge
- Extra Long 8' Rubber Cord with 3-prong Grounded Plug

Includes: Auxiliary Handle, Chuck Key

1035VSR also features

- One-handed Keyless Chuck

1132VSR – 3/8" Right-Angle Drill



- Low Profile Design - For Drilling in close quarters
- Easy To Actuate Paddle-type Switch
- Variable Speed Dial - For matching speed to the application

Includes: Chuck, Chuck Key

Specifications

Model#	Rating	Amperage	No Load RPM	Torque (in. lbs.)	Spindle Size	Maximum Hole Diameter in Wood (In.) - Paddle Bit	Maximum Hole Diameter in Wood (In.) - Self-Feed Bit	Maximum Hole Diameter in Wood (In.) - Auger Bit	Maximum Hole Diameter in Wood (In.) - Twist Drill Bit	Maximum Hole Diameter in Steel (In.) - Hole Saw	Length (in.)	Weight (lbs.)
1013VSR	120V	6.5	0-850	373	1/2"-20	1-1/2"	2-1/4"	3-5/8"	1-3/8"	1/2"	10-9/10"	5.1
1034VSR	120V	8.0	0-550	767	1/2"-20	1-1/2"	2-9/16"	4-1/2"	1-1/2"	1/2"	11-1/5"	5.3
1033VSR(1035VSR)	120V	8.0	0-850	472	1/2"-20	1-1/2"	2-9/16"	3-5/8"	1-1/2"	1/2"	11-1/8"	5.3 (5.0)
1132VSR	120V	3.8	0-1,100	N/A	3/8"	N/A	N/A	1"	N/A	N/A	11-3/4"	4.0



See pages 184-214 for
Drilling and Fastening
accessories.



Toll free: **877-BOSCH-99**



BOSCH


Dare Devil™ Spade Bits




Feed your need for speed. Bosch Dare Devil™ spade bits offer the industry's leading performance over any other spade bit available today



2.4X FASTER*

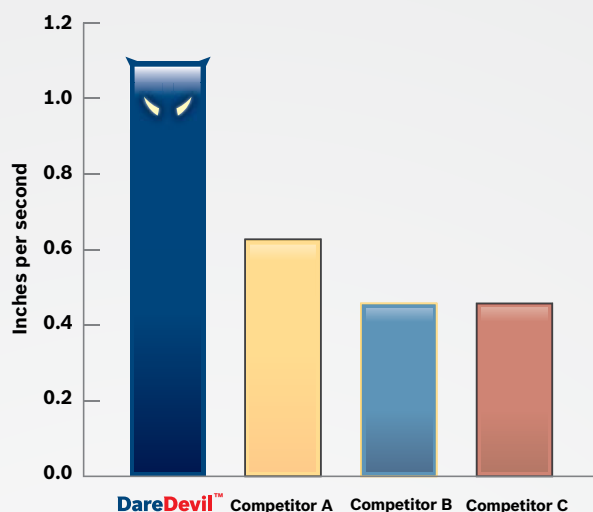

53% LESS FORCE*

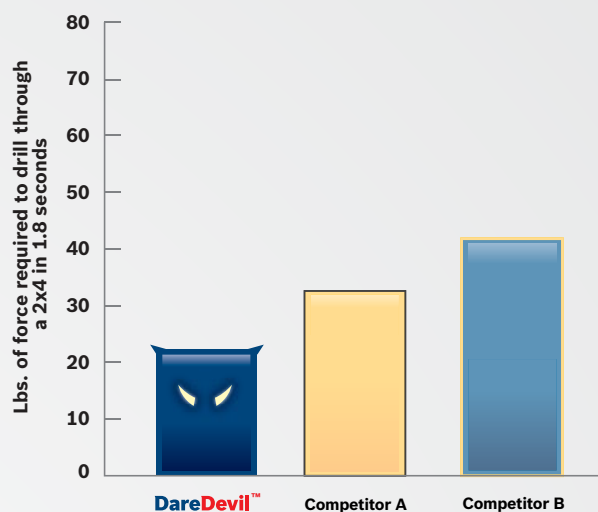

Faster drilling



Uses less force!

*Based on independent testing head to head testing of 3/4" spade bits performed by Intertek.



BOSCH

For more details visit
Boschtools.com

DareDevil™ Spade Bits

NEW


Feed your need for speed!

Full Cone Threaded Tip
Fast and effortless drilling

Spur and Reamer
Cleaner holes



Hex Shank with Power Groove
Reduces slippage

Contoured Paddle
Faster chip removal



Drills 2.4X Faster with 53% Less Force than leading competitor



DSB1013

DareDevil™ Standard Spade Bits

Item #	Diameter	Overall Length	Quantity	Bulk Item	Bulk Quantity
DSB1001	1/4"	6"	5	DSB1001B	60
DSB1002	5/16"	6"	5	DSB1002B	60
DSB1003	3/8"	6"	5	DSB1003B	50
DSB1004	7/16"	6"	5	DSB1004B	50
DSB1005	1/2"	6"	5	DSB1005B	50
DSB1006	9/16"	6"	5	DSB1006B	50
DSB1007	5/8"	6"	5	DSB1007B	50
DSB1008	11/16"	6"	5	DSB1008B	40
DSB1009	3/4"	6"	5	DSB1009B	40
DSB1010	13/16"	6"	5	DSB1010B	40
DSB1011	7/8"	6"	5	DSB1011B	40
DSB1012	15/16"	6"	5	DSB1012B	30
DSB1013	1"	6"	5	DSB1013B	30
DSB1015	1-1/8"	6"	5	DSB1015B	25
DSB1017	1-1/4"	6"	5	DSB1017B	25
DSB1019	1-3/8"	6"	5	DSB1019B	20
DSB1021	1-1/2"	6"	5	DSB1021B	20
DSBE1006	N/A	6" extension	5	N/A	
DSBE1012	N/A	12" extension	1	N/A	

DLSB1009

DareDevil™ Extended Length Spade Bits

Item #	Diameter	Overall Length	Quantity	Bulk Item	Bulk Quantity
DLSB1003	3/8"	16"	5	DLSB1003B	30
DLSB1005	1/2"	16"	5	DLSB1005B	30
DLSB1007	5/8"	16"	5	DLSB1007B	30
DLSB1009	3/4"	16"	5	DLSB1009B	30
DLSB1011	7/8"	16"	5	DLSB1011B	30
DLSB1013	1"	16"	5	DLSB1013B	30

DSB5006P



DSBS1009

DareDevil™ Stubby Length Spade Bits

Item #	Diameter	Overall Length	Quantity	Bulk Item	Bulk Quantity
DSBS1003	3/8"	4"	5	DSBS1003B	60
DSBS1005	1/2"	4"	5	DSBS1005B	60
DSBS1007	5/8"	4"	5	DSBS1007B	60
DSBS1009	3/4"	4"	5	DSBS1009B	50
DSBS1011	7/8"	4"	5	DSBS1011B	50
DSBS1013	1"	4"	5	DSBS1013B	40
DSBS1015	1-1/8"	4"	5	DSBS1015B	40
DSBS1017	1-1/4"	4"	5	DSBS1017B	40
DSBS1021	1-1/2"	4"	5	DSBS1021B	30

Item #	Description	Contents
DSB5003	3 pc. spade bit set	1/2", 3/4", 1"
DSB5005	6 pc. spade bit set with extension	3/8", 1/2", 5/8", 3/4", 7/8", 6" extension
DSB5006	6 pc. spade bit set	3/8", 1/2", 5/8", 3/4", 7/8", 1"
DSB5006P	6 pc. spade bit set in pouch	3/8", 1/2", 5/8", 3/4", 7/8", 1"
DSB5013P	13 pc. spade bit set in pouch	1/4", 3/8", 1/2", 9/16", 5/8", 11/16", 3/4", 7/8", 1", 1-1/8", 1-1/4", 1-3/8", 1-1/2"
DSB5010	10 pc. spade bit set	3/8", 1/2", 5/8", 3/4", 9/16", 7/8", 1", 1-1/8", 1-1/4", 6" extension
DSB5003	3 pc. stubby spade bit set	1/2", 3/4", 1"
DSB5007P	6 pc. stubby spade bit set in pouch	1/2", 5/8", 3/4", 7/8", 1", 6" extension

NOTE: Drill bits (or extension + drill bit) in excess of 8" should never exceed 600 RPM.

Wood Drilling


Augers

NailKiller™ Augers

NEW



Easy in wood, tough on nails

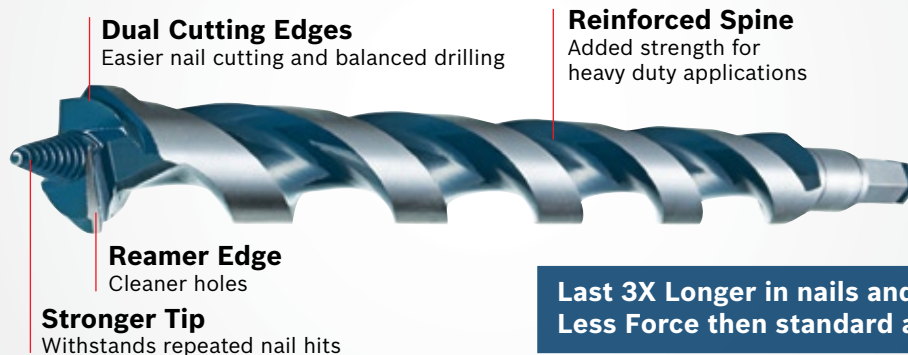

Dual Cutting Edges

Easier nail cutting and balanced drilling

Reinforced Spine

Added strength for heavy duty applications

Reamer Edge

Cleaner holes

Stronger Tip

Withstands repeated nail hits

Last 3X Longer in nails and cuts with 20% Less Force than standard auger bits

Item #	Diameter	Overall Length	Flute Length	Shank Size	Item Quantity	Bulk Item#	Bulk Quantity
NKST04	1/4"	7-1/2"	4"	3/16"	1	NKSB04	5
NKST05	5/16"	7-1/2"	4"	1/4"	1	NKSB05	5
NKST06	3/8"	7-1/2"	4"	1/4"	1	NKSB06	5
NKST07	7/16"	7-1/2"	4"	1/4"	1	NKSB07	5
NKST08	1/2"	7-1/2"	4"	5/16"	1	NKSB08	5
NKST09	9/16"	7-1/2"	4"	7/16"	1	NKSB09	5
NKST10	5/8"	7-1/2"	4"	7/16"	1	NKSB10	5
NKST11	11/16"	7-1/2"	4"	7/16"	1	NKSB11	5
NKST12	3/4"	7-1/2"	4"	7/16"	1	NKSB12	5
NKST13	13/16"	7-1/2"	4"	7/16"	1	NKSB13	5
NKST14	7/8"	7-1/2"	4"	7/16"	1	NKSB14	5
NKST15	15/16"	7-1/2"	4"	7/16"	1	NKSB15	5
NKST16	1"	7-1/2"	4"	7/16"	1	NKSB16	5
NKST18	1-1/8"	7-1/2"	4"	7/16"	1	NKSB18	3
NKST20	1-1/4"	7-1/2"	4"	7/16"	1	NKSB20	3
NKST22	1-3/8"	7-1/2"	4"	7/16"	1	NKSB22	3
NKST24	1-1/2"	7-1/2"	4"	7/16"	1	NKSB24	3
NKMT06	3/8"	13"	9"	1/4"	1	n/a	n/a
NKMT07	7/16"	13"	9"	1/4"	1	n/a	n/a
NKMT08	1/2"	13"	9"	5/16"	1	n/a	n/a
NKMT09	9/16"	13"	9"	7/16"	1	n/a	n/a
NKMT10	5/8"	13"	9"	7/16"	1	n/a	n/a
NKMT11	11/16"	13"	9"	7/16"	1	n/a	n/a
NKMT12	3/4"	13"	9"	7/16"	1	n/a	n/a
NKMT13	13/16"	13"	9"	7/16"	1	n/a	n/a
NKMT14	7/8"	13"	9"	7/16"	1	n/a	n/a
NKMT15	15/16"	13"	9"	7/16"	1	n/a	n/a
NKMT16	1"	13"	9"	7/16"	1	n/a	n/a
NKMT18	1-1/8"	13"	9"	7/16"	1	n/a	n/a
NKMT20	1-1/4"	13"	9"	7/16"	1	n/a	n/a
NKMT22	1-3/8"	13"	9"	7/16"	1	n/a	n/a
NKMT24	1-1/2"	13"	9"	7/16"	1	n/a	n/a
NKLT06	3/8"	17-1/2"	13-1/2"	1/4"	1	NKLB06	5
NKLT07	7/16"	17-1/2"	13-1/2"	1/4"	1	NKLB07	5
NKLT08	1/2"	17-1/2"	13-1/2"	5/16"	1	NKLB08	5
NKLT09	9/16"	17-1/2"	13-1/2"	7/16"	1	NKLB09	5
NKLT10	5/8"	17-1/2"	13-1/2"	7/16"	1	NKLB10	5
NKLT11	11/16"	17-1/2"	13-1/2"	7/16"	1	NKLB11	5
NKLT12	3/4"	17-1/2"	13-1/2"	7/16"	1	NKLB12	5
NKLT13	13/16"	17-1/2"	13-1/2"	7/16"	1	NKLB13	5
NKLT14	7/8"	17-1/2"	13-1/2"	7/16"	1	NKLB14	5
NKLT15	15/16"	17-1/2"	13-1/2"	7/16"	1	NKLB15	5
NKLT16	1"	17-1/2"	13-1/2"	7/16"	1	NKLB16	5
NKLT17	1-1/16"	17-1/2"	13-1/2"	7/16"	1	NKLB17	3
NKLT18	1-1/8"	17-1/2"	13-1/2"	7/16"	1	NKLB18	3
NKLT20	1-1/4"	17-1/2"	13-1/2"	7/16"	1	NKLB20	3
NKLT22	1-3/8"	17-1/2"	13-1/2"	7/16"	1	NKLB22	3
NKLT24	1-1/2"	17-1/2"	13-1/2"	7/16"	1	NKLB24	3
NKXB0711	11/16"	24"	18"	7/16"	1	NKXB1011	5
NKXB0713	13/16"	24"	18"	7/16"	1	NKXB1013	5
NKXB0715	15/16"	24"	18"	7/16"	1	NKXB1015	5
NKXB0717	1-1/16"	24"	18"	7/16"	1	NKXB1017	3

NOTE: Drill bits (or extension + drill bit) in excess of 8" should never exceed 600 RPM.



Wood Drilling

Self-Feed/Forstner/Brad Point/Installer

187

Self-Feed Bits

Bosch's line of Self Feed bits are designed for the professional plumber and electrician who needs to make large, rough holes in wood. Each bit features:

- 7/16" Hex shank for reduced slippage (3" and larger 3-Flat shank)
- Resharpenable chip lifters and spurs to maximize bit life
- Deep cutter gullets prevents stalling and drills smooth
- Replaceable threaded tip and hex key included

Item #	Diameter	Replacement Kit
SF1001	1"	SF5018
SF1121	1-1/8"	SF5018
SF1251	1-1/4"	SF5018
SF1371	1-3/8"	SF5018
SF1501	1-1/2"	SF5018
SF1751	1-3/4"	SF5018
SF2001	2"	SF5018
SF2121	2-1/8"	SF5018
SF2251	2-1/4"	SF5018
SF2561	2-9/16"	SF5018
SF3001	3"	SF5032
SF3621	3-5/8"	SF5032
SF4621	4-5/8"	SF5032



Self-Feed Replacement Kits

Item #	Contents
SF5018	(1) screw tip, (1) set screw, (1) 1/8" hex wrench
SF5032	(1) screw tip, (1) set screw, (1) 5/32" hex wrench

Self-Feed Bit Extensions

Item #	Length	Shank
EX1006	6"	7/16"
EX1012	12"	7/16"



Forstner Bits

Bosch's line of Forstner bits are designed for perfectly smooth, flat-bottomed holes.

- Wood storage case (FB1600, FB700)



Item #	Diameter
FB004	1/4"
FB006	3/8"
FB008	1/2"
FB010	5/8"
FB012	3/4"
FB014	7/8"
FB016	1"
FB018	1-1/8"
FB020	1-1/4"
FB022	1-3/8"
FB024	1-1/2"
FB026	1-5/8"
FB028	1-3/4"
FB030	1-7/8"
FB032	2"
FB034	2-1/8"
FB1600	1 Each, All Above Sizes
FB700	1/4", 3/8", 1/2", 5/8", 3/4", 7/8", 1"

Bell Hanger/Installer Bits



Bosch's line of Bell Hanger bits are designed for the professional electrician or low voltage cable installer.

Each bit features:

- Hole in flute for fishing cable through drilled holes
- 3-Flat shank for reduced slippage
- Extra length for deep drilling

Item #	Diameter	Overall Length	Item Quantity	Bulk Item#	Bulk Quantity
BH1001	1/4"	12"	1	BH1001B	6
BH1002	5/16"	12"	1	BH1002B	6
BH1003	3/8"	12"	1	BH1003B	6
BH1005	1/2"	12"	1	BH1005B	6
BH2001	1/4"	18"	1	BH2001B	6
BH2002	5/16"	18"	1	BH2002B	6
BH2003	3/8"	18"	1	BH2003B	6
BH2005	1/2"	18"	1	BH2005B	6
BH3001	1/4"	24"	1	BH3001B	6
BH3002	5/16"	24"	1	BH3002B	6
BH3003	3/8"	24"	1	BH3003B	6
BH3005	1/2"	24"	1	BH3005B	6

Brad Point Bits

Bosch's line of Brad Point bits are designed for drilling smooth clean holes. Each bit features:

- Tip that provides easy positioning and accurate starts
- Designed for both portable drills and drill presses



Item #	Diameter	Shank Diameter	Overall Length	Flute Length
B14601	1/8"	1/8"	2-3/4"	1-5/8"
B14602	3/16"	3/16"	3-1/2"	2-5/16"
B14603	1/4"	1/4"	3-5/16"	2-1/4"
B14604	5/16"	5/16"	4-7/16"	2-3/4"
B14605	3/8"	5/16"	5-3/16"	3-1/4"
B14606	7/16"	5/16"	5-9/16"	3-1/2"
B14607	1/2"	5/16"	5-15/16"	3-1/2"
B14609	5/8"	3/8"	7"	4-1/4"
B14615	1/4", 5/16", 3/8", 7/16", 1/2", 5/8"	Various	Various	Various

Hinge Boring Bits

Bosch's line of Hinge Boring bits are designed for European type hinges.

Each bit features:

- Centering point and outside scoring tips
- 10mm shank with locking flat and adjustable screw top for automatic and semi-automatic boring machines
- Not for use with 3-jaw chucks



Item #	Diameter	Description
T15005	5 mm	Right twist
T15015	5 mm	Left twist
T15008	8 mm	Right twist
T15018	8 mm	Left twist
T15010	10 mm	Right twist
T15110	10 mm	Left twist
T15215	15 mm	For European type hinges
T15020	20 mm	For European type hinges
T15025	25 mm	For European type hinges
T15026	26 mm	For European type hinges
T15126	26 mm	For European type hinges
T15030	30 mm	For European type hinges
T15035	35 mm	For European type hinges
T15138	38 mm	For European type hinges
T15040	40 mm	For European type hinges

Metal Drilling

Choosing the Right Bit

The Bosch line of metal drill bits offers a solution for every professional application. Each bit is manufactured to exacting specifications and features a 135° split point that starts on contact with no walking or skating, eliminating the need for a center punch.


Black Oxide



For general purpose drilling

- Speed helix design for 3X faster drilling than standard bits
- Lasts 50% longer than HSS bits
- Available in jobber length, stubby length, extended length (aircraft), 1/2" reduced shank (Silver+Deming)


Titanium

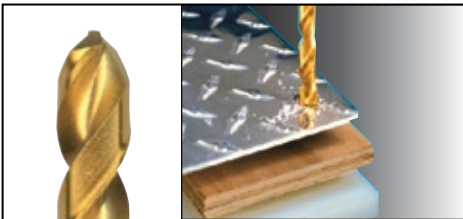

For heavy duty repetitive drilling

- Lasts up to 6X longer than HSS bits
- Speed helix design for 3X faster drilling than standard bits
- Surface hardness in excess of 80 HRC to penetrate tough materials, including stainless steel
- Available in jobber length with 3/8" reduced shank

Cobalt

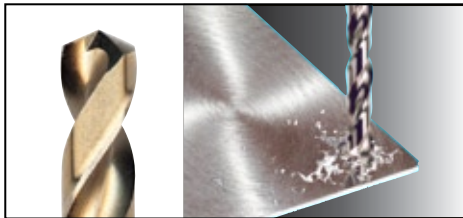

For heavy-duty drilling in extremely hard or abrasive materials

- Withstand high temperature applications for extended periods of time (up to 11000F)
- Thick web design adds stability to bit in tough applications
- Surface hardness 66-68 HRC to penetrate tough abrasive materials
- Available in jobber length, full shank

Material Chart


Material/Application	Wood	Plastic	Light Gauge Metal	High Carbon Steel	Aluminum & Alloy Steel	Cast Iron	Stainless Steel
Black oxide 	●	●	●	●	●	●	●
Titanium 	●	●	●	●	●	●	●
Cobalt 	●	●	●	●	●	●	●

● Recommended ● Acceptable ● Not Recommended



Titanium Coated Drill Bits

Item #	Diameter	Overall Length	Shank Diameter	Quantity
Carded Items				
TI2131	1/16"	1-7/8"	1/16"	2
TI2132	5/64"	2"	5/64"	2
TI2133	3/32"	2-1/4"	3/32"	2
TI2134	7/64"	2-5/8"	7/64"	2
TI2135	1/8"	2-3/4"	1/8"	2
TI2136	9/64"	2-7/8"	9/64"	1
TI2137	5/32"	3-1/8"	5/32"	1
TI2138	11/64"	3-1/4"	11/64"	1
TI2139	3/16"	3-1/2"	3/16"	1
TI2140	13/64"	3-5/8"	13/64"	1
TI2141	7/32"	3-3/4"	7/32"	1
TI2142	15/64"	13-7/8"	15/64"	1
TI2143	1/4"	4"	1/4"	1
TI2144	17/64"	4-1/8"	17/64"	1
TI2145	9/32"	4-1/4"	9/32"	1
TI2146	19/64"	4-3/8"	19/64"	1
TI2147	5/16"	4-1/2"	5/16"	1
TI2148	21/64"	4-5/8"	21/64"	1
TI2149	11/32"	4-3/4"	11/32"	1
TI2150	23/64"	4-7/8"	23/64"	1
TI2151	3/8"	5"	3/8"	1
TI2152	25/64"	5-1/8"	3/8"	1
TI2153	13/32"	5-1/4"	3/8"	1
TI2154	27/64"	5-3/8"	3/8"	1
TI2155	7/16"	5-1/2"	3/8"	1
TI2156	29/64"	5-5/8"	3/8"	1
TI2157	15/32"	5-3/4"	3/8"	1
TI2158	31/64"	5-7/8"	3/8"	1
TI2159	1/2"	6"	3/8"	1
Bulk Items				
TI4131	1/16"	1-7/8"	1/16"	12
TI4132	5/64"	2"	5/64"	12
TI4133	3/32"	2-1/4"	3/32"	12
TI4134	7/64"	2-5/8"	7/64"	12
TI4135	1/8"	2-3/4"	1/8"	12
TI4136	9/64"	2-7/8"	9/64"	12
TI4137	5/32"	3-1/8"	5/32"	12
TI4138	11/64"	3-1/4"	11/64"	12
TI4139	3/16"	3-1/2"	3/16"	12
TI4140	13/64"	3-5/8"	13/64"	12
TI4141	7/32"	3-3/4"	7/32"	12
TI4142	15/64"	3-7/8"	15/64"	12
TI4143	1/4"	4"	1/4"	12
TI4144	17/64"	4-1/8"	17/64"	6
TI4145	9/32"	4-1/4"	9/32"	6
TI4146	19/64"	4-3/8"	19/64"	6
TI4147	5/16"	4-1/2"	5/16"	6
TI4148	21/64"	4-5/8"	21/64"	6
TI4149	11/32"	4-3/4"	11/32"	6
TI4150	23/64"	4-7/8"	23/64"	6
TI4151	3/8"	5"	3/8"	6
TI4152	25/64"	5-1/8"	3/8"	6
TI4153	13/32"	5-1/4"	3/8"	6
TI4154	27/64"	5-3/8"	3/8"	6
TI4155	7/16"	5-1/2"	3/8"	6
TI4156	29/64"	5-5/8"	3/8"	6
TI4157	15/32"	5-3/4"	3/8"	6
TI4158	31/64"	5-7/8"	3/8"	6
TI4159	1/2"	6"	3/8"	6

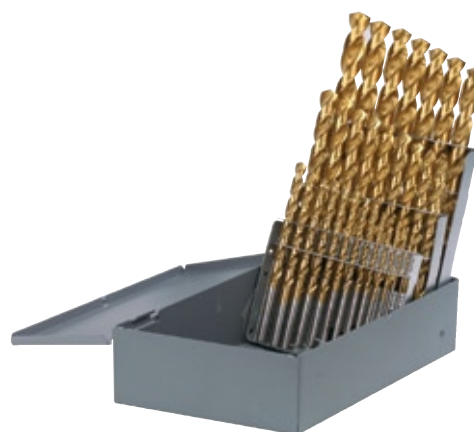
TI18

TI4029

Titanium Coated Drill Bit Sets

Item #	# of Pieces	Description
TI10	10	10 pc. set in heavy duty plastic case
TI4013	13	Fractional jobber length 1/16" to 1/4" by 64ths metal index
TI15	15	15 pc. set in blow-molded plastic case
TI18	18	18 pc. set in heavy duty plastic case
TI4029	29	Fractional jobber length 1/16" to 1/2" by 64ths metal index

Metal Drilling

Black Oxide



Fractional Jobber Length Black Oxide Drill Bits

Item #	Diameter	Overall Length	Shank Diameter	Quantity
Carded Items				
BL2131	1/16"	1-7/8"	1/16"	2
BL2132	5/64"	2"	5/64"	2
BL2133	3/32"	2-1/4"	3/32"	2
BL2134	7/64"	2-5/8"	7/64"	2
BL2135	1/8"	2-3/4"	1/8"	2
BL2136	9/64"	2-7/8"	9/64"	1
BL2137	5/32"	3-1/8"	5/32"	1
BL2138	11/64"	3-1/4"	11/64"	1
BL2139	3/16"	3-1/2"	3/16"	1
BL2140	13/64"	3-5/8"	13/64"	1
BL2141	7/32"	3-3/4"	7/32"	1
BL2142	15/64"	3-7/8"	15/64"	1
BL2143	1/4"	4"	1/4"	1
BL2144	17/64"	4-1/8"	17/64"	1
BL2145	9/32"	4-1/4"	9/32"	1
BL2146	19/64"	4-3/8"	19/64"	1
BL2147	5/16"	4-1/2"	5/16"	1
BL2148	21/64"	4-5/8"	21/64"	1
BL2149	11/32"	4-3/4"	11/32"	1
BL2150	23/64"	4-7/8"	23/64"	1
BL2151	3/8"	5"	3/8"	1
BL2152	25/64"	5-1/8"	3/8"	1
BL2153	13/32"	5-1/4"	3/8"	1
BL2154	27/64"	5-3/8"	3/8"	1
BL2155	7/16"	5-1/2"	3/8"	1
BL2156	29/64"	5-5/8"	3/8"	1
BL2157	15/32"	5-3/4"	3/8"	1
BL2158	31/64"	5-7/8"	3/8"	1
BL2159	1/2"	6"	3/8"	1

Bulk Items				
BL4128	1/64"	3/4"	1/64"	12
BL4129	1/32"	1-3/8"	1/32"	12
BL4130	3/64"	1-3/4"	3/64"	12
BL4131	1/16"	1-7/8"	1/16"	12
BL4132	5/64"	2"	5/64"	12
BL4133	3/32"	2-1/4"	3/32"	12
BL4134	7/64"	2-5/8"	7/64"	12
BL4135	1/8"	2-3/4"	1/8"	12
BL4136	9/64"	2-7/8"	9/64"	12
BL4137	5/32"	3-1/8"	5/32"	12
BL4138	11/64"	3-1/4"	11/64"	12
BL4139	3/16"	3-1/2"	3/16"	12
BL4140	13/64"	3-5/8"	13/64"	12
BL4141	7/32"	3-3/4"	7/32"	12
BL4142	15/64"	3-7/8"	15/64"	12
BL4143	1/4"	4"	1/4"	12
BL4144	17/64"	4-1/8"	17/64"	6
BL4145	9/32"	4-1/4"	9/32"	6
BL4146	19/64"	4-3/8"	19/64"	6
BL4147	5/16"	4-1/2"	5/16"	6
BL4148	21/64"	4-5/8"	21/64"	6
BL4149	11/32"	4-3/4"	11/32"	6
BL4150	23/64"	4-7/8"	23/64"	6
BL4151	3/8"	5"	3/8"	6
BL4152	25/64"	5-1/8"	3/8"	6
BL4153	13/32"	5-1/4"	3/8"	6
BL4154	27/64"	5-3/8"	3/8"	6
BL4155	7/16"	5-1/2"	3/8"	6
BL4156	29/64"	5-5/8"	3/8"	6
BL4157	15/32"	5-3/4"	3/8"	6
BL4158	31/64"	5-7/8"	3/8"	6
BL4159	1/2"	6"	3/8"	6



Extra Length (Aircraft) Black Oxide Drill Bits

Item #	Diameter	Overall Length	Shank Diameter	Quantity
BL2630	3/64"	6"	3/64"	1
BL2631	1/16"	6"	1/16"	1
BL2731	1/16"	12"	1/16"	1
BL2632	5/64"	6"	5/64"	1
BL2633	3/32"	6"	3/32"	1
BL2634	7/64"	6"	7/64"	1
BL2635	1/8"	6"	1/8"	1
BL2735	1/8"	12"	1/8"	1
BL2636	9/64"	6"	9/64"	1
BL2637	5/32"	6"	5/32"	1
BL2638	11/64"	6"	11/64"	1
BL2639	3/16"	6"	3/16"	1
BL2739	3/16"	12"	3/16"	1
BL2640	13/64"	6"	13/64"	1
BL2641	7/32"	6"	7/32"	1
BL2642	15/64"	6"	15/64"	1
BL2643	1/4"	6"	1/4"	1
BL2743	1/4"	12"	1/4"	1
BL2647	5/16"	6"	5/16"	1
BL2747	5/16"	12"	5/16"	1
BL2651	3/8"	6"	3/8"	1
BL2751	3/8"	12"	3/8"	1
BL2655	7/16"	6"	7/16"	1
BL2755	7/16"	12"	7/16"	1
BL2759	1/2"	12"	1/2"	1



Fractional 1/2" Reduced Shank (Silver & Deming) Black Oxide Drill Bits

Item #	Diameter	Overall Length	Shank Diameter	Quantity
BL2160	33/64"	6"	1/2"	1
BL2161	17/32"	6"	1/2"	1
BL2162	35/64"	6"	1/2"	1
BL2163	9/16"	6"	1/2"	1
BL2164	37/64"	6"	1/2"	1
BL2165	19/32"	6"	1/2"	1
BL2166	39/64"	6"	1/2"	1
BL2167	5/8"	6"	1/2"	1
BL2168	41/64"	6"	1/2"	1
BL2169	21/32"	6"	1/2"	1
BL2170	43/64"	6"	1/2"	1
BL2171	11/16"	6"	1/2"	1
BL2172	45/64"	6"	1/2"	1
BL2173	23/32"	6"	1/2"	1
BL2174	47/64"	6"	1/2"	1
BL2175	3/4"	6"	1/2"	1
BL2176	49/64"	6"	1/2"	1
BL2178	51/64"	6"	1/2"	1
BL2179	13/16"	6"	1/2"	1
BL2180	53/64"	6"	1/2"	1
BL2177	25/32"	6"	1/2"	1
BL2181	27/32"	6"	1/2"	1
BL2182	55/64"	6"	1/2"	1
BL2183	7/8"	6"	1/2"	1
BL2184	57/64"	6"	1/2"	1
BL2185	29/32"	6"	1/2"	1
BL2186	59/64"	6"	1/2"	1
BL2187	15/16"	6"	1/2"	1
BL2188	61/64"	6"	1/2"	1
BL2189	31/32"	6"	1/2"	1
BL2190	63/64"	6"	1/2"	1
BL2191	1"	6"	1/2"	1
BL2192	1-1/64"	6"	1/2"	1
BL2193	1-1/32"	6"	1/2"	1
BL2195	1-1/16"	6"	1/2"	1
BL2197	1-3/32"	6"	1/2"	1
BL2199	1-1/8"	6"	1/2"	1


BOSCH

 For more details visit
Boschtools.com

Fractional 1/2" Reduced Shank (Silver & Deming) Black Oxide Drill Bits (continued)

Item #	Diameter	Overall Length	Shank Diameter	Quantity
BL2201	1-5/32"	6"	1/2"	1
BL2203	1-3/16"	6"	1/2"	1
BL2207	1-1/4"	6"	1/2"	1
BL2211	1-5/16"	6"	1/2"	1
BL2215	1-3/8"	6"	1/2"	1
BL2219	1-7/16"	6"	1/2"	1
BL2223	1-1/2"	6"	1/2"	1



Fractional Stubby Length Black Oxide Drill Bits (Bulk)

Item #	Diameter	Overall Length	Shank Diameter	Quantity
BL3135	1/8"	1-7/8"	1/8"	12
BL3139	3/16"	2-3/16"	3/16"	12
BL3143	1/4"	2-1/2"	1/4"	12



Letter Size Black Oxide Drill Bits (Bulk)

Item #	Diameter	Overall Length	Shank Diameter	Quantity
BL4201	A	3-7/8"	0.2340"	12
BL4202	B	4"	0.2380"	12
BL4203	C	4"	0.2420"	12
BL4204	D	4"	0.2460"	12
BL4205	E	4"	0.2500"	12
BL4206	F	4-1/8"	0.2570"	12
BL4207	G	4-1/8"	0.2610"	6
BL4208	H	4-1/8"	0.2660"	6
BL4209	I	4-1/8"	0.2720"	6
BL4210	J	4-1/8"	0.2770"	6
BL4211	K	4-1/4"	0.2810"	6
BL4212	L	4-1/4"	0.2900"	6
BL4213	M	4-3/8"	0.2950"	6
BL4214	N	4-3/8"	0.3020"	6
BL4215	O	4-1/2"	0.3160"	6
BL4216	P	4-5/8"	0.3230"	6
BL4217	Q	4-3/4"	0.3320"	6
BL4218	R	4-3/4"	0.3390"	6
BL4219	S	4-7/8"	0.3480"	6
BL4220	T	4-7/8"	0.3580"	6
BL4221	U	5"	0.3680"	6
BL4222	V	5"	0.3770"	6
BL4223	W	5-1/8"	0.3860"	6
BL4224	X	5-1/8"	0.3970"	6
BL4225	Y	5-1/4"	0.4040"	6
BL4226	Z	5-1/4"	0.4130"	6



Fractional Double-end Black Oxide Drill Bits (Bulk)

Item #	Diameter	Overall Length	Shank Diameter	Quantity
BL6134	7/64"	1-15/16"	7/64"	12
BL6135	1/8"	2-1/8"	1/8"	12
BL6136	9/64"	2-5/32"	9/64"	12
BL6137	5/32"	2-5/32"	5/32"	12
BL6139	3/16"	2-5/16"	3/16"	12
BL6141	7/32"	2-5/16"	7/32"	12
BL6143	1/4"	2-5/16"	1/4"	12



Wire Gauge Double-end Black Oxide Drill Bits (Bulk)

Item #	Diameter	Overall Length	Shank Diameter	Quantity
BL6011	11	2-5/16"	0.1910"	12
BL6020	20	2-5/32"	0.1610"	12
BL6030	30	2-1/8"	0.1285"	12



Wire Gauge Black Oxide Drill Bits (Bulk)

Item #	Diameter	Overall Length	Shank Diameter	Quantity
BL4001	1	3-7/8"	0.2280"	12
BL4002	2	3-7/8"	0.2210"	12
BL4003	3	3-3/4"	0.2130"	12
BL4004	4	3-3/4"	0.2090"	12
BL4005	5	3-3/4"	0.2055"	12
BL4006	6	3-3/4"	0.2040"	12
BL4007	7	3-5/8"	0.2010"	12
BL4008	8	3-5/8"	0.1990"	12
BL4009	9	3-5/8"	0.1960"	12
BL4010	10	3-5/8"	0.1935"	12
BL4011	11	3-1/2"	0.1910"	12
BL4012	12	3-1/2"	0.1890"	12
BL4013	13	3-1/2"	0.1850"	12
BL4014	14	3-3/8"	0.1820"	12
BL4015	15	3-3/8"	0.1800"	12
BL4016	16	3-3/8"	0.1770"	12
BL4017	17	3-3/8"	0.1730"	12
BL4018	18	3-1/4"	0.1695"	12
BL4019	19	3-1/4"	0.1660"	12
BL4020	20	3-1/4"	0.1610"	12
BL4021	21	3-1/4"	0.1590"	12
BL4022	22	3-1/8"	0.1570"	12
BL4023	23	3-1/8"	0.1540"	12
BL4024	24	3-1/8"	0.1520"	12
BL4025	25	3"	0.1495"	12
BL4026	26	3"	0.1470"	12
BL4027	27	3"	0.1440"	12
BL4028	28	2-7/8"	0.1405"	12
BL4029	29	2-7/8"	0.1360"	12
BL4030	30	2-3/4"	0.1285"	12
BL4031	31	2-3/4"	0.1200"	12
BL4032	32	2-3/4"	0.1160"	12
BL4033	33	2-5/8"	0.1130"	12
BL4034	34	2-5/8"	0.1110"	12
BL4035	35	2-5/8"	0.1100"	12
BL4036	36	2-1/2"	0.1065"	12
BL4037	37	2-1/2"	0.1040"	12
BL4038	38	2-1/2"	0.1015"	12
BL4039	39	2-3/8"	0.0995"	12
BL4040	40	2-3/8"	0.0980"	12
BL4041	41	2-3/8"	0.0960"	12
BL4042	42	2-1/4"	0.0935"	12
BL4043	43	2-1/4"	0.0890"	12
BL4044	44	2-1/8"	0.0860"	12
BL4045	45	2-1/8"	0.0820"	12
BL4046	46	2-1/8"	0.0810"	12
BL4047	47	2"	0.0785"	12
BL4048	48	2"	0.0760"	12
BL4049	49	2"	0.0730"	12
BL4050	50	2"	0.0700"	12
BL4051	51	2"	0.0670"	12
BL4052	52	1-7/8"	0.0635"	12
BL4053	53	1-7/8"	0.0595"	12
BL4054	54	1-7/8"	0.0550"	12
BL4055	55	1-7/8"	0.0520"	12
BL4056	56	1-3/4"	0.0465"	12
BL4057	57	1-3/4"	0.0430"	12
BL4058	58	1-5/8"	0.0420"	12
BL4059	59	1-5/8"	0.0410"	12
BL4060	60	1-5/8"	0.0400"	12

Metal Drilling

Black Oxide/Cobalt



BL20



BL0029

Black Oxide Drill Bit Sets

Item #	# of Pieces	Description
BL0008	8	Fractional 1/2" reduced shank 9/16" to 1" by 16ths in metal index
BL10	10	10 pc. set in blow-molded plastic case
BL0013	13	Fractional jobber length 1/16" to 1/4" by 64ths in metal index
BL0015	15	Fractional jobber length 1/16" to 1/2" by 32nds in metal index
BL15	15	15 pc. set in blow-molded plastic case
BL20	20	20 pc. set in heavy duty plastic case
BL0021	21	Fractional jobber length 1/16" to 3/8" by 64ths in metal index
BL0026	26	Letter size jobber length A to Z in metal index
BL0029	29	Fractional jobber length 1/16" to 1/2" by 64ths in metal index
BL0060	60	Wire gauge jobber length # 1 to # 60 in metal index
BL4115	115	Fractional / letter / wire gauge jobber length in metal index

NOTE: Drill bits (or extension + drill bit) in excess of 8" should never exceed 600 RPM.



Cobalt Drill Bits


Item #	Diameter	Overall Length	Shank Diameter	Quantity
Carded Items				
CO2131	1/16"	1-7/8"	1/16"	1
CO2132	5/64"	2"	5/64"	1
CO2133	3/32"	2-1/4"	3/32"	1
CO2134	7/64"	2-5/8"	7/64"	1
CO2135	1/8"	2-3/4"	1/8"	1
CO2136	9/64"	2-7/8"	9/64"	1
CO2137	5/32"	3-1/8"	5/32"	1
CO2138	11/64"	3-1/4"	11/64"	1
CO2139	3/16"	3-1/2"	3/16"	1
CO2140	13/64"	3-5/8"	13/64"	1
CO2141	7/32"	3-3/4"	7/32"	1
CO2142	15/64"	3-7/8"	15/64"	1
CO2143	1/4"	4"	1/4"	1
CO2144	17/64"	4-1/8"	17/64"	1
CO2145	9/32"	4-1/4"	9/32"	1
CO2146	19/64"	4-3/8"	19/64"	1
CO2147	5/16"	4-1/2"	5/16"	1
CO2148	21/64"	4-5/8"	21/64"	1
CO2149	11/32"	4-3/4"	11/32"	1
CO2150	23/64"	4-7/8"	23/64"	1
CO2151	3/8"	5"	3/8"	1
CO2152	25/64"	5-1/8"	25/64"	1
CO2153	13/32"	5-1/4"	13/32"	1
CO2154	27/64"	5-3/8"	27/64"	1
CO2155	7/16"	5-1/2"	7/16"	1
CO2156	29/64"	5-5/8"	29/64"	1
CO2157	15/32"	5-3/4"	15/32"	1
CO2158	31/64"	5-7/8"	31/64"	1
CO2159	1/2"	6"	1/2"	1

Cobalt Drill Bits (continued)

Item #	Diameter	Overall Length	Shank Diameter	Quantity
Bulk Items				
CO4128	1/64"	3/4"	1/64"	12
CO4129	1/32"	1-3/8"	1/32"	12
CO4130	3/64"	1-3/4"	3/64"	12
CO4131	1/16"	1-7/8"	1/16"	12
CO4132	5/64"	2"	5/64"	12
CO4133	3/32"	2-1/4"	3/32"	12
CO4134	7/64"	2-5/8"	7/64"	12
CO4135	1/8"	2-3/4"	1/8"	12
CO4136	9/64"	2-7/8"	9/64"	12
CO4137	5/32"	3-1/8"	5/32"	12
CO4138	11/64"	3-1/4"	11/64"	12
CO4139	3/16"	3-1/2"	3/16"	12
CO4140	13/64"	3-5/8"	13/64"	12
CO4141	7/32"	3-3/4"	7/32"	12
CO4142	15/64"	3-7/8"	15/64"	12
CO4143	1/4"	4"	1/4"	12
CO4144	17/64"	4-1/8"	17/64"	6
CO4145	9/32"	4-1/4"	9/32"	6
CO4146	19/64"	4-3/8"	19/64"	6
CO4147	5/16"	4-1/2"	5/16"	6
CO4148	21/64"	4-5/8"	21/64"	6
CO4149	11/32"	4-3/4"	11/32"	6
CO4150	23/64"	4-7/8"	23/64"	6
CO4151	3/8"	5"	3/8"	6
CO4152	25/64"	5-1/8"	25/64"	6
CO4153	13/32"	5-1/4"	13/32"	6
CO4154	27/64"	5-3/8"	27/64"	6
CO4155	7/16"	5-1/2"	7/16"	6
CO4156	29/64"	5-5/8"	29/64"	6
CO4157	15/32"	5-3/4"	15/32"	6
CO4158	31/64"	5-7/8"	31/64"	6
CO4159	1/2"	6"	1/2"	6



CO18



CO4029

Cobalt Drill Bit Sets

Item #	# of Pieces	Description
CO10	10	10 pc. set in blow-molded plastic case
CO4013	13	Fractional jobber length 1/16" to 1/4" by 64ths in metal index
CO18	18	18 pc. set in blow-molded plastic case
CO4029	29	Fractional jobber length 1/16" to 1/2" by 64ths in metal index


BOSCH

 For more details visit
Boschtools.com

Step Drill Bits

Bosch's line of Step Drills offer the ability to drill up to 13 holes with a single bit. Cuts are clean and accurate even in the toughest material. Ideal for electrical, plumbing and HVAC contractors.

Super hard titanium coating lasts up to 6X longer than High Speed Steel



Self Starting Point
Starts on contact

Balanced Double Flute
Eliminates chatter and vibration

Resharpenable Cutting Edge
Longer tool life

Three Flat Shank
For reduced slippage



High Speed Steel

Titanium Coated Step Drills



Item #	Diameter Inches (Increments)	Step Depth	Number of Hole Sizes	Shank Diameter	Application	Point Type
SDT1	1/8" - 1/2" (1/32")	1/8"	13	1/4"	All common drilling needs	Self-starting
SDT6	3/16" - 1/2" (1/16")	3/8"	6	1/4"	All common drilling needs	Self-starting
SDT2	3/16" - 7/8" (1/16")	1/8"	12	3/8"	All common drilling needs	Self-starting
SDT3	1/4" - 3/4" (1/16")	1/8"	9	3/8"	Ideal for cutting medium size holes	Self-starting
SDT4	1/4" - 7/8" - 1-1/8"	5/32"	3	3/8"	For 1/2" and 3/4" conduit	Self-starting
SDT10	1/4" - 1-3/8" (1/8")	1/8"	10	3/8"	For 1" conduit and tubing	Self-starting
SDT12	3/8"	N/A	1	1/4"	Knockout	Self-starting
SDT8	1/2"	N/A	1	1/4"	Knockout	Self-starting
SDT7	9/16" - 1" (1/16")	1/8"	8	3/8"	Companion bit to SDT1 for diameter range 1/8" to 1" (requires 1/2" pilot hole)	For hole enlarging
SDT9	13/16" - 1-3/8" (1/16")	1/8"	10	1/2"	For 1" conduit and tubing (requires 3/4" pilot hole)	For hole enlarging
SDT5	7/8"	N/A	1	3/8"	Drill perfect size holes for conduit. Ideal for drawbolt and miniature pilot light holes	Self-starting
SDT11	1-1/8"	N/A	1	1/2"	Knockout	Self-starting

NOTE: Drill bits (or extension + drill bit) in excess of 8" should never exceed 600 RPM.

Step Drill Sets

Item #	Description
SDT30	3 pc. titanium step drill set includes SDT1, SDT3 and SDT6
SDH30	3 pc. high speed steel step drill set includes SDH1, SDH3 and SDH6



Metal Drilling

Step Drills/Counter Sinks

High Speed Steel Step Drills



Item #	Diameter Inches (Increments)	Step Depth	Number of Hole Sizes	Shank Diameter	Application	Point Type
SDH1	1/8" - 1/2" (1/32")	1/8"	13	1/4"	All common drilling needs	Self-starting
SDH6	3/16" - 1/2" (1/16")	3/8"	6	1/4"	All common drilling needs	Self-starting
SDH2	3/16" - 7/8" (1/16")	1/8"	12	3/8"	All common drilling needs	Self-starting
SDH3	1/4" - 3/4" (1/16")	1/8"	9	3/8"	Ideal for cutting medium size holes	Self-starting
SDH4	1/4" - 7/8" - 1-1/8"	5/32"	3	3/8"	For 1/2" and 3/4" conduit	Self-starting
SDH10	1/4" - 1-3/8" (1/8")	1/8"	10	3/8"	For 1" conduit and tubing	Self-starting
SDH12	3/8"	N/A	1	1/4"	Knockout	Self-starting
SDH8	1/2"	N/A	1	1/4"	Knockout	Self-starting
SDH7	9/16" - 1" (1/16")	1/8"	8	3/8"	Companion bit to SDH1 for diameter range 1/8" to 1" (requires 1/2" pilot hole)	For hole enlarging
SDH9	13/16" - 1-3/8" (1/16")	1/8"	10	1/2"	For 1" conduit and tubing (requires 3/4" pilot hole)	For hole enlarging
SDH5	7/8"	N/A	1	3/8"	Drill perfect size holes for conduit. Ideal for drawbolt and miniature pilot light holes	Self-starting
SDH11	1-1/8"	N/A	1	1/2"	Knockout	Self-starting

NOTE: Drill bits (or extension + drill bit) in excess of 8" should never exceed 600 RPM.

Countersinks



Titanium Coated Countersinks

Item #	Diameter	Chamfer Angle	Shank Diameter	Number of Flutes
CST1	1/2"	82°	1/4"	5
CST2	5/8"	82°	1/4"	5
CST3	3/4"	82°	1/4"	5



High Speed Steel Countersinks

Item #	Diameter	Chamfer Angle	Shank Diameter	Number of Flutes
CSH1C	1/2"	82°	1/4"	5
CSH2C	5/8"	82°	1/4"	5
CSH3C	3/4"	82°	1/4"	5

NOTE: Drill bits (or extension + drill bit) in excess of 8" should never exceed 600 RPM.



Bosch Hole Saws

Broad line of products for every application


Now you can work faster and smarter – using our patented Quick Change Universal Hole Saw system. Its revolutionary design allows you to change any size or type of hole saw in seconds and allows easy plug removal.

Our complete family of hole saws tackle the widest range of materials in the industry.



Selecting the right cup

Select the best hole saw for your application.

		 Bi-Metal	 Multi-Construction	 Sheet Metal	 Diamond
	Wood	●	●	●	●
	Laminate	●	●	●	●
	Sheet Metal	●	●	●	●
	Thick Metal	●	●	●	●
	Stainless Steel	●	●	●	●
	Plastic	●	●	●	●
	Fiber glass	●	●	●	●
	Cement Board	●	●	●	●
	Masonry	●	●	●	●
	Wall Tile (Ceramic)	●	●	●	●
	Hard Tile (Porcelain)	●	●	●	●
	Stone (e.g Granite)	●	●	●	●
	Glass	●	●	●	●

● Recommended

● Acceptable

● Not Recommended

Hole Saws

Bi-Metal Hole Saws

Bi-Metal Hole Saws

Faster, longer cutting

Progressor™ Tooth Design
Faster cutting and longer life

Reinforced Shoulder
Increased strength and longer life

Progressive tooth and 10° cutting angle for high performance



8% Cobalt Alloy
Higher heat resistance and longer life

Quick Change Adapters
Make any Hole Saw **Quick Change™**



AN01
For hole saw sizes
9/16" - 1-3/16"



AN02
For hole saw sizes
1-1/4" - 6"

Bi-Metal Product Listing

Item #	Diameter	Cutting Depth	Quick Change Adapter (not included)	Mandrel
HB062	9/16"	1.6"	AN01	HSBAM, PCM38, PCM12, PCMSDSPL
HB063	5/8"	1.6"	AN01	HSBAM, PCM38, PCM12, PCMSDSPL
HB069	11/16"	1.6"	AN01	HSBAM, PCM38, PCM12, PCMSDSPL
HB075	3/4"	1.6"	AN01	HSBAM, PCM38, PCM12, PCMSDSPL
HB081	13/16"	1.6"	AN01	HSBAM, PCM38, PCM12, PCMSDSPL
HB087	7/8"	1.6"	AN01	HSBAM, PCM38, PCM12, PCMSDSPL
HB094	15/16"	1.6"	AN01	HSBAM, PCM38, PCM12, PCMSDSPL
HB100	1"	1.6"	AN01	HSBAM, PCM38, PCM12, PCMSDSPL
HB106	1-1/16"	1.6"	AN01	HSBAM, PCM38, PCM12, PCMSDSPL
HB112	1-1/8"	1.6"	AN01	HSBAM, PCM38, PCM12, PCMSDSPL
HB119	1-3/16"	1.6"	AN01	HSBAM, PCM38, PCM12, PCMSDSPL
HB125	1-1/4"	1.54"	AN02	HSBAM, HSBAMP, PCM38, PCM12, PCMSDSPL
HB131	1-5/16"	1.54"	AN02	HSBAM, HSBAMP, PCM38, PCM12, PCMSDSPL
HB136	1-3/8"	1.54"	AN02	HSBAM, HSBAMP, PCM38, PCM12, PCMSDSPL
HB144	1-7/16"	1.54"	AN02	HSBAM, HSBAMP, PCM38, PCM12, PCMSDSPL
HB150	1-1/2"	1.6"	AN02	HSBAM, HSBAMP, PCM38, PCM12, PCMSDSPL
HB156	1-9/16"	1.6"	AN02	HSBAM, HSBAMP, PCM38, PCM12, PCMSDSPL
HB163	1-5/8"	1.6"	AN02	HSBAM, HSBAMP, PCM38, PCM12, PCMSDSPL
HB169	1-11/16"	1.6"	AN02	HSBAM, HSBAMP, PCM38, PCM12, PCMSDSPL
HB175	1-3/4"	1.6"	AN02	HSBAM, HSBAMP, PCM38, PCM12, PCMSDSPL
HB181	1-13/16"	1.6"	AN02	HSBAM, HSBAMP, PCM38, PCM12, PCMSDSPL
HB187	1-7/8"	1.6"	AN02	HSBAM, HSBAMP, PCM38, PCM12, PCMSDSPL
HB200	2"	1.6"	AN02	HSBAM, HSBAMP, PCM38, PCM12, PCMSDSPL
HB206	2-1/16"	1.6"	AN02	HSBAM, HSBAMP, PCM38, PCM12, PCMSDSPL
HB212	2-1/8"	1.6"	AN02	HSBAM, HSBAMP, PCM38, PCM12, PCMSDSPL
HB225	2-1/4"	1.6"	AN02	HSBAM, HSBAMP, PCM38, PCM12, PCMSDSPL

Item #	Diameter	Cutting Depth	Quick Change Adapter (not included)	Mandrel
HB231	2-5/16"	1.6"	AN02	HSBAM, HSBAMP, PCM38, PCM12, PCMSDSPL
HB236	2-3/8"	1.6"	AN02	HSBAM, HSBAMP, PCM38, PCM12, PCMSDSPL
HB250	2-1/2"	1.6"	AN02	HSBAM, HSBAMP, PCM38, PCM12, PCMSDSPL
HB256	2-9/16"	1.6"	AN02	HSBAM, HSBAMP, PCM38, PCM12, PCMSDSPL
HB263	2-5/8"	1.6"	AN02	HSBAM, HSBAMP, PCM38, PCM12, PCMSDSPL
HB269	2-11/16"	1.6"	AN02	HSBAM, HSBAMP, PCM38, PCM12, PCMSDSPL
HB275	2-3/4"	1.6"	AN02	HSBAM, HSBAMP, PCM38, PCM12, PCMSDSPL
HB287	2-7/8"	1.6"	AN02	HSBAM, HSBAMP, PCM38, PCM12, PCMSDSPL
HB300	3"	1.6"	AN02	HSBAM, HSBAMP, PCM38, PCM12, PCMSDSPL
HB312	3-1/8"	1.6"	AN02	HSBAM, HSBAMP, PCM38, PCM12, PCMSDSPL
HB325	3-1/4"	1.6"	AN02	HSBAM, HSBAMP, PCM38, PCM12, PCMSDSPL
HB338	3-3/8"	1.6"	AN02	HSBAM, HSBAMP, PCM38, PCM12, PCMSDSPL
HB350	3-1/2"	1.6"	AN02	HSBAM, HSBAMP, PCM38, PCM12, PCMSDSPL
HB363	3-5/8"	1.6"	AN02	HSBAM, HSBAMP, PCM38, PCM12, PCMSDSPL
HB375	3-3/4"	1.6"	AN02	HSBAM, HSBAMP, PCM38, PCM12, PCMSDSPL
HB387	3-7/8"	1.6"	AN02	HSBAM, HSBAMP, PCM38, PCM12, PCMSDSPL
HB400	4"	1.6"	AN02	HSBAM, HSBAMP, PCM38, PCM12, PCMSDSPL
HB412	4-1/8"	1.6"	AN02	HSBAM, HSBAMP, PCM38, PCM12, PCMSDSPL
HB425	4-1/4"	1.6"	AN02	HSBAM, HSBAMP, PCM38, PCM12, PCMSDSPL
HB436	4-3/8"	1.6"	AN02	HSBAM, HSBAMP, PCM38, PCM12, PCMSDSPL
HB450	4-1/5"	1.6"	AN02	HSBAM, HSBAMP, PCM38, PCM12, PCMSDSPL
HB475	4-3/4"	1.6"	AN02	HSBAM, HSBAMP, PCM38, PCM12, PCMSDSPL
HB500	5"	1.6"	AN02	HSBAM, HSBAMP, PCM38, PCM12, PCMSDSPL
HB550	5-1/2"	1.6"	AN02	HSBAM, HSBAMP, PCM38, PCM12, PCMSDSPL
HB575	5-3/4"	1.6"	AN02	HSBAM, HSBAMP, PCM38, PCM12, PCMSDSPL
HB600	6"	1.6"	AN02	HSBAM, HSBAMP, PCM38, PCM12, PCMSDSPL

Hole Saw Mandrels

Standard Mandrels



3/8" shank for 9/16" to 1-3/16"
HSBAM



3/8" shank for 1-1/4" to 6"
HSBAMP



7/16" shank for 1-1/4" to 6"
HSBAL



Mandrels (for hole saws 9/16"–6")



3/8" shank
PCM38



7/16" shank
PCM12



SDS shank
PCMSDSPL

For a complete listing of mandrels and pilot bits, refer to page 210.



BOSCH



For more details visit
Boschtools.com

Hole Saws

Quick Change Mandrel

197

Bi-Metal Product Listing continued, Sets

Item #	Description
HB17PL	17 Pc. Plumber Set: (7) hole saws: 3/4", 7/8", 1-1/8", 1-3/8", 1-3/4", 2-1/4", 2-9/16"; (3) Small adapters (AN01); (4) Large adapters (AN02); (1) Quick Change mandrel (PCM38); (2) pilot bits (HB85PB)
HB19EL	19 Pc. Electrician Set: Set Includes: (8) hole saws 3/4", 7/8", 1-1/8", 1-3/8", 1-3/4", 2", 2-9/16", 3"; (3) Small adapters (AN01); (5) Large adapters (AN02); (1) Quick Change mandrel (PCM38); (2) pilot bits (HB85PB)
HB25M	25 Pc. Master Set: Set Includes: (11) hole saws: 3/4", 7/8", 1", 1-1/8", 1-3/8", 1-1/2", 1-3/4", 2", 2-1/8", 2-1/2", 3; (4) Small adapters (AN01); (7) Large adapters (AN02); (1) Quick Change mandrel (PCM38); (2) pilot bits (HB85PB)
HBUSKIT	Universal Quick Change Hole Saw Kit: (4) hole saws: 1", 1-1/2", 2-1/8", 2-1/2"; (1) Small adapters (AN01); (1) Large adapters (AN02); (1) Quick Change mandrel (PCM38); (1) pilot bits (HB85PB)

HB19EL

19 Pc.
Electrician Set



HB17PL

17 Pc.
Plumber Set



HB25M

25 Pc.
Master Set



HBUSKIT

Universal Quick
Change Hole Saw Kit



Quick Change Mandrel

Change hole saw types
or sizes in seconds

1.



Attach adapter
to any hole saw

2.



Attach hole saw to
QUICK Change™ mandrel

3.



Pull back black sleeve
to release hole saw

**HSS, Cobalt and
Carbide Pilot Bits**

To match your application
needs



**7/16", 3/8" and
SDS-Plus Shanks**

To match your application
and tool



Quick Change Adapters

Make any hole saw **QUICK Change™**



Hole Saws

Thin Wall Hole Saws, Hole Enlarger

Thin Wall Hole Saws

Clean, fast cutting even in impact mode



Pilot Bit Spring
For automatic disk ejection

Thin Wall Construction
Fast, clean cutting in sheet metal

Depth Stopper
Prevents breakthrough to protect the work surface

IMPACT TOUGH



HTW1



HTW112

Thin Wall Hole Saws

Item # Diameter

HTW34	3/4"
HTW78	7/8"
HTW1	1"
HTW118	1-1/8"
HTW114	1-1/4"
HTW138	1-3/8"
HTW112	1-1/2"
HTWS	3 Pc. Set: 7/8", 1-1/8", 1-3/8"
HTWPB	Thin Wall Hole Saw Replacement Pilot Bit

Hole Enlarger


Enlarge existing holes quickly, easily, accurately

Integral Quick Change Adapter

Change hole saw sizes and types in seconds and remove material plugs easily

Large and Small Washers

Allows two different hole saw sizes to be used together

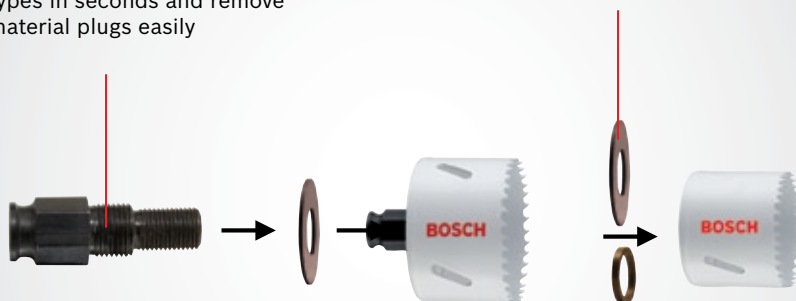

Smaller Hole Saw
Acts as a pilot bit

Larger Hole Saw
Cuts new hole



HE1

Hole Enlarger Kit

The Hole Enlarger makes it possible to expand holes in tight retrofit situations, door lock installations, and for conduit fitting.



BOSCH

For more details visit
Boschtools.com

Hole Saws

Sheet Metal Hole Saws

Sheet Metal Hole Saws

Variable Tooth Pitch

For fast, precise cutting in sheet metal

Depth Stopper

Prevents breakthrough to protect the work surface

Removable Spring

(1-3/4" and larger)
For automatic disk ejection

Extended Reinforced Threads

For maximum cup strength

Quick Change Adapters

Make any Hole Saw **Quick Change™**



AN01
For hole saw sizes
9/16" - 1-3/16"



AN02
For hole saw sizes
1-1/4" - 6"



Sheet Metal Product Listing

Item #	Diameter	Cutting Depth	Quick Change Adapter	Mandrel
HSM062	9/16"	7/8" *	AN01	HSBAM, PCM38, PCM12, PCMSDSPL
HSM063	5/8"	7/8" *	AN01	HSBAM, PCM38, PCM12, PCMSDSPL
HSM075	3/4"	7/8" *	AN01	HSBAM, PCM38, PCM12, PCMSDSPL
HSM087	7/8"	7/8" *	AN01	HSBAM, PCM38, PCM12, PCMSDSPL
HSM100	1"	7/8" *	AN01	HSBAM, PCM38, PCM12, PCMSDSPL
HSM112	1-1/8"	7/8" *	AN01	HSBAM, PCM38, PCM12, PCMSDSPL
HSM125	1-1/4"	7/8" *	AN02	HSBAMP, HSBAL PCM38, PCM12, PCMSDSPL
HSM136	1-3/8"	7/8" *	AN02	HSBAMP, HSBAL PCM38, PCM12, PCMSDSPL
HSM150	1-1/2"	7/8" *	AN02	HSBAMP, HSBAL PCM38, PCM12, PCMSDSPL
HSM175	1-3/4"	7/8" *	AN02	HSBAMP, HSBAL PCM38, PCM12, PCMSDSPL
HSM187	1-7/8"	7/8" *	AN02	HSBAMP, HSBAL PCM38, PCM12, PCMSDSPL
HSM200	2"	7/8" *	AN02	HSBAMP, HSBAL PCM38, PCM12, PCMSDSPL
HSM212	2-1/8"	7/8" *	AN02	HSBAMP, HSBAL PCM38, PCM12, PCMSDSPL
HSM225	2-1/4"	7/8" *	AN02	HSBAMP, HSBAL PCM38, PCM12, PCMSDSPL
HSM250	2-1/2"	7/8" *	AN02	HSBAMP, HSBAL PCM38, PCM12, PCMSDSPL
HSM256	2-9/16"	7/8" *	AN02	HSBAMP, HSBAL PCM38, PCM12, PCMSDSPL
HSM263	2-5/8"	7/8" *	AN02	HSBAMP, HSBAL PCM38, PCM12, PCMSDSPL
HSM275	2-3/4"	7/8" *	AN02	HSBAMP, HSBAL PCM38, PCM12, PCMSDSPL
HSM300	3"	7/8" *	AN02	HSBAMP, HSBAL PCM38, PCM12, PCMSDSPL
HSM312	3-1/8"	7/8" *	AN02	HSBAMP, HSBAL PCM38, PCM12, PCMSDSPL
HSM325	3-1/4"	7/8" *	AN02	HSBAMP, HSBAL PCM38, PCM12, PCMSDSPL
HSM350	3-1/2"	7/8" *	AN02	HSBAMP, HSBAL PCM38, PCM12, PCMSDSPL
HSM363	3-5/8"	7/8" *	AN02	HSBAMP, HSBAL PCM38, PCM12, PCMSDSPL
HSM375	3-3/4"	7/8" *	AN02	HSBAMP, HSBAL PCM38, PCM12, PCMSDSPL

Item #	Diameter	Cutting Depth	Quick Change Adapter	Mandrel
HSM400	4"	7/8" *	AN02	HSBAMP, HSBAL PCM38, PCM12, PCMSDSPL
HSM412	4-1/8"	7/8" *	AN02	HSBAMP, HSBAL PCM38, PCM12, PCMSDSPL
HSM450	4-1/5"	7/8" *	AN02	HSBAMP, HSBAL PCM38, PCM12, PCMSDSPL
HSM500	5"	7/8" *	AN02	HSBAMP, HSBAL PCM38, PCM12, PCMSDSPL
HSM550	5-1/2"	7/8" *	AN02	HSBAMP, HSBAL PCM38, PCM12, PCMSDSPL
HSM600	6"	7/8" *	AN02	HSBAMP, HSBAL PCM38, PCM12, PCMSDSPL

Item # Description

HSM15PCE	(6) hole saws: 7/8", 1-1/8", 1-3/8", 1-3/4", 2", 2-1/2"; 3-3/8" cobalt pilot bit; (4) Large adapters (AN02); (2) Small adapters (AN01); (1) 3/8" Quick Change mandrel; springs for hole saws from 1-3/4"-6"
HSM23PCM	(10) hole saws: 3/4", 7/8", 1-1/8", 1-3/8", 1-1/2", 1-3/4", 2", 2-1/8", 2-1/2", 3"; 3-3/8" Cobalt pilot bit; (7) Large adapters (AN02); (3) Small adapters (AN01); (1) 3/8" Quick Change mandrel; springs for hole saws from 1-3/4"-6"

* 1/4" maximum recommended cutting depth

HSM15PCE
15 Pc. Sht Mtl HS



HSM23PCM
23 Pc. Sht Mtl HS



Hole Saw Mandrels

Standard Mandrels



3/8" shank for 9/16" to 1-3/16"
HSBAM



3/8" shank for 1-1/4" to 6"
HSBAMP



7/16" shank for 1-1/4" to 6"
HSBAL



Mandrels (for hole saws 9/16"-6")



3/8" shank
PCM38



7/16" shank
PCM12



SDS shank
PCMSDSPL

For a complete listing of mandrels and pilot bits, refer to page 210.



BOSCH

For more details visit
Boschtools.com

Hole Saws

Diamond Hole Saws

201

Mini Diamond Hole Saws

NEW

Item #	Diameter	Cutting Depth
HDG316	3/16"	1-3/8"
HDG14	1/4"	1-3/8"
HDG516	5/16"	1-3/8"
HDG38	3/8"	1-3/8"
HDG12	1/2"	1-3/8"
HDG58	5/8"	1-3/8"



Mini Diamond Hole Saw

Item #	Description
HDGM	Diamond HS mini 3pc set: (3) hole saw: 3/16", 1/4", 1/2"

Diamond Hole Saws with AutoStart™

Fast and easy starts, even in the hardest tile



Integral Quick Change Adapter
Change hole saw sizes and types in seconds and remove material plugs easily

Vacuum Brazed Diamond Grit
Faster cutting and longer life

Segmented Teeth
Reduces debris and heat build-up

Carbide Tip

Extremely long life in porcelain and granite



Spring-loaded, Retractable Shaft
Allows walk free cutting without a pilot hole

Unique Grind
Starts holes on the mark every time

Diamond Hole Saw Product Listing

Item #	Diameter	Cutting Depth	Item #	Diameter	Cutting Depth
HDG34	3/4"	1-3/8"	HDG214	2-1/4"	1-3/8"
HDG78	7/8"	1-3/8"	HDG212	2-1/2"	1-3/8"
HDG1	1"	1-3/8"	HDG234	2-3/4"	1-3/8"
HDG118	1-1/8"	1-3/8"	HDG3	3"	1-3/8"
HDG114	1-1/4"	1-3/8"	HDG318	3-1/8"	1-3/8"
HDG138	1-3/8"	1-3/8"	HDG314	3-1/4"	1-3/8"
HDG112	1-1/2"	1-3/8"	HDG312	3-1/2"	1-3/8"
HDG158	1-5/8"	1-3/8"	HDG358	3-5/8"	1-3/8"
HDG134	1-3/4"	1-3/8"	HDG334	3-3/4"	1-3/8"
HDG2	2"	1-3/8"	HDG4	4"	1-3/8"
HDG218	2-1/8"	1-3/8"	HDG418	4-1/8"	1-3/8"

* 1" maximum recommended cutting depth

Item #	Description
HDGQA	Diamond HS Mandrel w AutoStart™
HDG138QA	Diamond HS 1-3/8" starter set: (1) mandrel, (1) AutoStart™, (1) hole saw: 1-3/8"
HDG78	Diamond HS 7pc set: (1) mandrel, (1) AutoStart™, (5) hole saw: 5/8", 1", 1-3/8", 2", 2-1/4"
HDG11	Diamond HS 11pc set: (1) mandrel (1) AutoStart™, (9) hole saw: 1/4", 5/16", 3/8", 5/8", 1", 1-3/8", 2", 2-1/4", 2-1/2"

Common Materials For Diamond Grit Hole Saws



Use water for longer life

Hole Saw Mandrels



Mandrels (for hole saws 9/16"-6")



3/8" shank
PCM38

7/16" shank
PCM12

SDS shank
PCMSDSPL

Pilot Bits (for hole saws 3/4"-4-1/8")



AutoStart™ Pilot Bit
HDGPB6

For a complete listing of mandrels and pilot bits, refer to page 210.



Hole Saws

Mandrels & Pilot Bits

Standard Mandrels



HSBAL

Large Pinned Mandrel
for Hole Saws 1-1/4" - 6"
7/16" shank



HSBAMP

Large Pinned Mandrel
for Hole Saws 1-1/4" - 6"
3/8" shank



HSBAM

Medium Mandrel
for Hole Saws 9/16" - 6"
(Recommended 9/16"-1-3/16")
3/8" shank



Mandrels



PCM38

3/8" Mandrel
For all hole saws 9/16"-6"
Use with AN01 or AN02



PCM12

7/16" Mandrel
For all hole saws 9/16"-6"
Use with AN01 or AN02



PCMSDSPL

SDS Mandrel
For all hole saws 9/16"-6"
Use with AN01 or AN02



AN01

For hole saw sizes
9/16" - 1-3/16"



AN02

For hole saw sizes
1-1/4" - 6"



PCM38AN

Universal Quick Change Mandrel Kit

Set includes:
(1) 3/8" mandrel; Small adapter for hole saw sizes 9/16"-1-3/16"; large adapter for hole saw sizes 1-1/4" - 6".



PCM12AN

Set includes:
7/16" mandrel; Small adapter for hole saw sizes 9/16"-1-3/16"; large adapter for hole saw sizes 1-1/4" - 6".



CK2

Quick Change Conversion Kit

Set includes:
(2) Small adapters for hole saw sizes 9/16"-1-3/16";
(4) large adapters for hole saw sizes 1-1/4"-6"




HE1

Hole Enlarger Kit

The Hole Enlarger makes it possible to expand holes in tight retrofit situations, door lock installations, and for conduit fitting.



Mandrel



Change hole saw types
or sizes in seconds



Easy plug removal

Pilot Bits

Item #	Description	Use with Mandrel	Hole Saw Series
HB85PB	3-3/8" High Speed Steel Pilot Bit	PCM38, PCM12, PCMSDSPL	Bimetal
HSM80PB	3-1/8" Cobalt Pilot Bit	PCM38, PCM12, PCMSDSPL	Sheet Metal
PCPD4	4-3/4" Cobalt Pilot Bit	PCM38, PCM12, PCMSDSPL	Multi-Construction
HTCTCP	4-3/4" Carbide Tipped Pilot Bit	PCM38, PCM12, PCMSDSPL	Multi-Construction
HSPB	3-1/8" High Speed Steel Pilot Bit	HSBAM, HSBAMP, HSBAL	Bimetal, Sheet Metal
HDGPB6	AutoStart™ Centering Pin (for diamond hole saws 3/4"-4-1/8")	PCM38, PCM12	Tile, Stone and Glass
HTWPB	2-1/2" High Speed Steel Pilot Bit with Spring	Included	Thin Wall



HB85PB

High Speed Steel Pilot Bit



HSM80PB

Cobalt Pilot Bit



PCPD4

Cobalt Pilot Bit



HTCTCP

Carbide Pilot Bit



HSPB

High Speed Steel Pilot Bit



HDGPB6

Auto Start™ Pilot Bit



BOSCH



For more details visit
Boschtools.com

Screwdriver Bits

Bosch offers a wide range of quality screwdriver bits designed and manufactured to meet the toughest work conditions. The broad product offering includes 16 different bit geometries and a wide assortment of bit holders and nutsetters



Phillips®



Slotted



TORX®



TORX ALIGN®



POZIDRIV®


Phillips Square
Drive® Quadrex®

Square Recess
Robertson®


Spanner



TORX-SET®



TRI-WING®


Socket Head/
Allen Head


Clutch Type A



Clutch-Type G



Frearson



TORX w/PIN


Socket Head
w/Pin

P2+R2 Combo Bits

NEW



2-In-1 Bit for Phillips and Robertson screws

Patented Bit Geometry


Allows user to drive Phillips (P2) and Robertson (Square Drive) (R2) screw heads



**High Quality
S2M Tool Steel**
For longer bit life

DIN/ANSI Ratings
To meet US and
European standards

2 in 1



P2R22102



P2R2115TCB



43074

Carded Items

P2R2 Combo Bits

Item #	Description	Point	Length
P2R22102	P2R2 Combo Bit, 2pk carded	P2R2	1"
P2R22101	P2R2 Combo Bit, 1pk carded	P2R2	2"
P2R22151	P2R2 Combo Bit, 1pk carded	P2R2	1-1/2"
P2R22205	P2R2 Combo Bit, 5pk carded	P2R2	2"

Bulk Items

Item #	Description	Point	Length
27026	P2R2 Combo Bit, Insert Bit Bulk	P2R2	1"
27027	P2R2 Combo Bit, Power Bit Bulk	P2R2	1-1/2"
27028	P2R2 Combo Bit, Power Bit Bulk	P2R2	2"

Cookie Jar

43074	P2R2 Combo Bit Cookie Jar 250 pc	P2R2	1"
43075	P2R2 Combo Bit Cookie Jar 100 pc	P2R2	2"

Tic Tac

P2R2115TCB	P2R2 Combo Bit, 15PC Tic-Tac	P2R2	1"
------------	------------------------------	------	----



Toll free: 877-BOSCH-99



BOSCH

Screwdriver Bits

Impact Bits

New Impact Accessories

Engineered to take the hit and finish the job

Bosch has engineered a line of screwdriving bits, nutsetters and sockets that can handle the torque in the increasing applications where impact drivers are used.



Impact Insert Bit



Impact Power Bit



Impact Nutsetter

Bulk Items

Insert Bits

27209	P1 1" Insert Bit Impact	P1	1"
27210	P2 1" Insert Bit Impact	P2	1"
27211	P3 1" Insert Bit Impact	P3	1"
27212	P2R 1" Insert Bit Impact	P2R	1"
27219	R1 1" Insert Bit Impact	R1	1"
27220	R2 1" Insert Bit Impact	R2	1"
27224	R3 1" Insert Bit Impact	R3	1"
27229	T15 1" Insert Bit Impact	T15	1"
27230	T20 1" Insert Bit Impact	T20	1"
27231	T25 1" Insert Bit Impact	T25	1"
27232	T30 1" Insert Bit Impact	T30	1"

Power Bits

27213	P1 2" Power Bit Impact	P1	1-15/16"
27214	P2 2" Power Bit Impact	P2	1-15/16"
27216	P3 2" Power Bit Impact	P3	1-15/16"
27217	P2 3-1/2" Power Bit Impact	P2	3-1/2"
27218	P2 6" Power Bit Impact	P2	6"
27225	R1 2" Power Bit Impact	R1	1-15/16"
27226	R2 2" Power Bit Impact	R2	1-15/16"
27227	R3 2" Power Bit Impact	R3	1-15/16"
27228	R2 3-1/2" Power Bit Impact	R2	3-1/2"
27233	T15 2" Power Bit Impact	T15	1-15/16"
27234	T20 2" Power Bit Impact	T20	1-15/16"
27235	T25 2" Power Bit Impact	T25	1-15/16"
27236	T30 2" Power Bit Impact	T30	1-15/16"
27287	2" Magnetic Bit Holder Impact		2"

Nut Setters

Item #	Description	Point	Length
27237	1/4" x 1-5/8" Mag Nut Setter Impact	1/4"	1-5/8"
27238	5/16" x 1-7/8" Mag Nut Setter Impact	5/16"	1-7/8"
27239	3/8" x 1-7/8" Mag Nut Setter Impact	3/8"	1-7/8"
27240	7/16" x 1-7/8" Mag Nut Setter Impact	7/16"	1-7/8"
27241	1/4" x 2-9/16" Mag Nut Setter Impact	1/4"	2-9/16"
27242	5/16" x 2-9/16" Mag Nut Setter Impact	5/16"	2-9/16"
27243	3/8" x 2-9/16" Mag Nut Setter Impact	3/8"	2-9/16"
27244	7/16" x 2-9/16" Mag Nut Setter Impact	7/16"	2-9/16"

Screwdriver Bits

NEW

Takes the impact and completes the job

Forged Tip
Reduces breakage

Torsion Zone
Absorbs torque peaks
reducing stress at the tip

Hardened Core
Increases bit strength,
reduces fracture

IMPACT TOUGH™



Meets or exceeds ANSI B107.2
Impact Standard

Impact Socket

Bulk Items

Sockets and Socket Adapters

Item #	Description	Point	Square Drive
27245	1/4" Hex to 3/8" Socket Adapter	-	3/8"
27246	1/4" Hex to 1/2" Socket Adapter	-	1/2"
27251	5/16" Deep Well, 3/8" Impact	5/16"	3/8"
27254	3/8" Deep Well, 3/8" Impact	3/8"	3/8"
27258	7/16" Deep Well, 3/8" Impact	7/16"	3/8"
27259	1/2" Deep Well, 3/8" Impact	1/2"	3/8"
27260	9/16" Deep Well, 3/8" Impact	9/16"	3/8"
27261	5/8" Deep Well, 3/8" Impact	5/8"	3/8"
27262	11/16" Deep Well, 3/8" Impact	11/16"	3/8"
27263	3/4" Deep Well, 3/8" Impact	3/4"	3/8"
27264	13/16" Deep Well, 3/8" Impact	13/16"	3/8"
27268	7/8" Deep Well, 3/8" Impact	7/8"	3/8"
27269	15/16" Deep Well, 3/8" Impact	15/16"	3/8"
27271	5/16" Deep Well, 1/2" Impact	5/16"	1/2"
27273	3/8" Deep Well, 1/2" Impact	3/8"	1/2"
27274	7/16" Deep Well, 1/2" Impact	7/16"	1/2"
27275	1/2" Deep Well, 1/2" Impact	1/2"	1/2"
27276	9/16" Deep Well, 1/2" Impact	9/16"	1/2"
27279	5/8" Deep Well, 1/2" Impact	5/8"	1/2"
27280	11/16" Deep Well, 1/2" Impact	11/16"	1/2"
27281	3/4" Deep Well, 1/2" Impact	3/4"	1/2"
27282	13/16" Deep Well, 1/2" Impact	13/16"	1/2"
27283	7/8" Deep Well, 1/2" Impact	7/8"	1/2"
27284	15/16" Deep Well, 1/2" Impact	15/16"	1/2"

Sets

Item #	Description
27285	Bosch Impact Tough 8pc 3/8" Socket Set: 5/16", 3/8", 7/16", 1/2", 9/16", 5/8", 11/16", 3/4"
27286	Bosch Impact Tough 9pc 1/2" Socket Set: 7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 13/16", 7/8", 15/16"



BOSCH

For more details visit
Boschtools.com


Screwdriver Bits

Square/Square Recess/ Slotted

Square & Square Recess



Square Recess Insert Bit



Square Recess Power Bit

Carded Items

Insert Bits

Item #	Description	Point	Length
SQ0102	Square #R0, 1" Insert Bit 2pk	R0	1"
SQ1102	Square #R1, 1" 2pk	R1	1"
SQ1102M	Square #R1, 1" Medium Hard 2pk	R1	1"
SQ2102	Square #R2, 1" 2pk	R2	1"
SQ3102	Square #R3, Ins.Bit 2pk	R3	1"

Power Bits

SQ1201M	Square #R1, Medium Hard, 5pk	R1	1-15/16"
SQR2D201	Square #R2D, 2" 5pk	R2	1-15/16"
CCSQ1201	Square #R1, 2" 1pk	R1	2"
CCSQ2201	Square #R2, 2" 1pk	R2	2"
CCSQ2205	Square #R2, 2" 5pk	R2	2"
CCSQ3201	Square #R3, 2" 1pk	R3	2"
SQ12701	Square #R1, 2-3/4" Bit	R1	2-3/4"
SQ22701	Square #R2, 2-3/4" Bit	R2	2-3/4"
SQ32701	Square #R3, 2-3/4" Bit	R3	2-3/4"
SQ1301	Square #R1, 3" Bit	R1	3"
SQ2301	Square #R2, 3" Bit	R2	3"
SQ3301	Square #R3, 3" Bit	R3	3"
SQ13501	Square #R1, 3-1/2" Bit	R1	3-1/2"
SQ33501	Square #R3, 3-1/2" Bit	R3	3-1/2"
SQ2401	Square #R2, 4" Bit	R2	4"
CCSQ2601	Square #R2, 6" Bit	R2	6"
SQ3601	Square #R3, 6" Bit	R3	6"

Bulk Items

Insert Bits-Extra Hard

Item #	Description	Point	Length
38509	#0 Square Recess Insert Bit x 1"	R0	1"
29049	#1 Square Recess Insert Bit x 1"	R1	1"
29050	#2 Square Recess Insert Bit x 1"	R2	1"
29051	#3 Square Recess Insert Bit x 1"	R3	1"

Insert Bits-Medium Hard

45195	#1 Square Recess Insert Bit x 1"	R1	1"
45196	#2 Square Recess Insert Bit x 1"	R2	1"
45197	#3 Square Recess Insert Bit x 1"	R3	1"

Power Bits Extra Hard

29052	#1 Square Recess Power Bit - 1-15/16"	R1	1-15/16"
29053	#2 Square Recess Power Bit - 1-15/16"	R2	1-15/16"
29054	#3 Square Recess Power Bit - 1-15/16"	R3	1-15/16"
29055	#1 Square Recess Power Bit - 2-3/4"	R1	2-3/4"
29056	#2 Square Recess Power Bit - 2-3/4"	R2	2-3/4"
29057	#3 Square Recess Power Bit - 2-3/4"	R3	2-3/4"
29058	#1 Square Recess Power Bit - 3"	R1	3"
29059	#2 Square Recess Power Bit - 3"	R2	3"
29060	#3 Square Recess Power Bit - 3"	R3	3"
39945	#1 Square Recess Power Bit - 3-1/2"	R1	3-1/2"
39947	#2 Square Recess Power Bit - 3-1/2"	R2	3-1/2"
39949	#3 Square Recess Power Bit - 3-1/2"	R3	3-1/2"
44136	#1 Square Recess Power Bit - 4"	R1	4"

Bulk Items

Power Bits Extra Hard continued

39953	#2 Square Recess Power Bit - 4"	R2	4"
44138	#3 Square Recess Power Bit - 4"	R3	4"
39957	#1 Square Recess Power Bit - 6"	R1	6"
39959	#2 Square Recess Power Bit - 6"	R2	6"
39961	#3 Square Recess Power Bit - 6"	R3	6"

Power Bits-Medium Hard

45184	#1 Square Recess Power Bit - 1-15/16"	R1	1-15/16"
45185	#2 Square Recess Power Bit - 1-15/16"	R2	1-15/16"
45186	#3 Square Recess Power Bit - 1-15/16"	R3	1-15/16"

Pinch Pack

Item #	Description	Point	Length
SQZRR2110	#2 Square Recess Insert Bit x 1", 10pk	R2	1"
SQZRR2125	#2 Square Recess Insert Bit x 1", 25pk	R2	1"
SQZRR225	#2 Square Recess Insert Bit x 2", 5pk	R2	2"

Big Tac

Item #	Description	Point	Length
BBT25R2	R2, 1" Big Tac, 25 PK	R2	2"

Slotted



Slotted Insert Bit



Slotted Power Bit

Carded Items

Insert Bits

Item #	Description	Point	Length
SL0102	Slotted 0-1, 1" Insert Bit, 2pk	0-1	1"
SL1102	Slotted 1-2, 1" Insert Bit, 2pk	1-2	1"
SL2102	Slotted 2-3, 1" Insert Bit 2pk	2-3	1"
SL3102	Slotted 3-4, 1" Insert Bit 2pk	3-4	1"
SL4102	Slotted 4-5, 1" Insert Bit 2 pk	4-5	1"
SL5102	Slotted 5-6, 1" Insert Bit 2 pk	5-6	1"
SL6102	Slotted 6-8, 1" Insert Bit, 2 pk	6-8	1"
SL8102	Slotted 8-10, 1" Insert Bit, 2pk	8-10	1"
SL10102	Slotted 10-12, 1" Insert Bit, 2pk	10-12	1"

Power Bits

SL56201	Slotted 5-6, 2" Gray Power Bit	5-6	1-15/16"
CCSL68201	Slotted 6-8, 2"	6-8	2"
SL1012201	Slotted 10-12, 2" Gray Power Bit	10-12	1-15/16"
SL1214201	Slotted 12-14, 2" Gray Power Bit	12-14	1-15/16"
SL8103501	Slotted 8-10, Gray 3-1/2" Bit	8-10	3-1/2"


BOSCH

 For more details visit
Boschtools.com

Screwdriver Bits

Slotted/Torx

207

Slotted continued

Bulk Items

Insert Bits

Item #	Description	Point	Length
41175	0-1 Slotted Insert Bit x 1"	0-1	1"
41176	1-2 Slotted Insert Bit x 1"	1-2	1"
41177	2-3 Slotted Insert Bit x 1"	2-3	1"
41178	3-4 Slotted Insert Bit x 1"	3-4	1"
39534	4-5 Slotted Insert Bit x 1"	4-5	1"
39535	5-6 Slotted Insert Bit x 1"	5-6	1"
39536	6-8 Slotted Insert Bit x 1"	6-8	1"
39537	8-10 Slotted Insert Bit x 1"	8-10	1"
39538	10-12 Slotted Insert Bit x 1"	10-12	1"
39539	12-14 Slotted Insert Bit x 1"	12-14	1"
27001	6-8 Slotted Insert Bit x 1-1/2"	6-8	1-1/2"

Power Bits-Rounded Body

27460	1-2 Slotted Power Bit x 1-15/16"	1-2	2"
27461	2-3 Slotted Power Bit x 1-15/16"	2-3	2"
27462	3-4 Slotted Power Bit x 1-15/16"	3-4	2"
27463	4-5 Slotted Power Bit x 1-15/16"	4-5	2"
27464	5-6 Slotted Power Bit x 1-15/16"	5-6	2"
27465	6-8 Slotted Power Bit x 1-15/16"	6-8	2"
27466	8-10 Slotted Power Bit x 1-15/16"	8-10	2"
27467	10-12 Slotted Power Bit x 1-15/16"	10-12	2"
27468	12-14 Slotted Power Bit x 1-15/16"	12-14	2"
27481	4-5 Slotted Power Bit x 3-1/2"	4-5	3-1/2"
27482	5-6 Slotted Power Bit x 3-1/2"	5-6	3-1/2"
27483	6-8 Slotted Power Bit x 3-1/2"	6-8	3-1/2"
27484	8-10 Slotted Power Bit x 3-1/2"	8-10	3-1/2"
27485	10-12 Slotted Power Bit x 3-1/2"	10-12	3-1/2"
27486	12-14 Slotted Power Bit x 3-1/2"	12-14	3-1/2"
27501	6-8 Slotted Power Bit x 6"	6-8	6"
27502	8-10 Slotted Power Bit x 6"	8-10	6"
27503	10-12 Slotted Power Bit x 6"	10-12	6"
27504	12-14 Slotted Power Bit x 6"----	12-14	6"

Pinch Pack

Item #	Description	Point	Length
SQZRSL6110	6-8 Slotted Insert Bit x 1", 10pk	6-8	1"
SQZRSL625	6-8 Slotted Power Bit x 1-15/16", 5pk	6-8	2"
SQZRSL8110	8-10 Slotted Insert Bit x 1", 10pk	8-10	1"
SQZRSL825	8-10 Slotted Power Bit x 1-15/16", 5pk	8-10	2"
T2643	3pc Slotted Bit Set	(6-8, 8-10, 10-12)	

Torx



Torx Insert Bit



Torx Power Bit

Carded Items

Insert Bits

Item #	Description	Point	Length
TX6102	Torx T6 MLLD Gray, 1" Insert Bit, 2pk	T6	1"
TX7102	Torx T7 MLLD Gray, 1" Insert Bit, 2pk	T7	1"
TX8102	Torx T8 MLLD Gray, 1" Insert Bit, 2pk	T8	1"
TX9102	Torx T9 MLLD Gray, 1" Insert Bit, 2pk	T9	1"
TX15102M	Torx T15, Gold, 1" Insert Bit, 2pk	T15	1"
TX1015102	Torx T10, T15, 1" 2pk	T10 & T15	1"
TX20102M	Torx T20, 1" Insert Bit 2pk	T20	1"
TX2025102	Torx T20, T25, 1", 2pk	T20 & T25	1"
TX25102M	Torx T25, 1" Insert Bit 2pk	T25	1"

Power Bits

TX10201	Torx T10, 2" Power Bit	T10	1-15/16"
TX15201	Torx T15, 2" Power Bit	T15	1-15/16"
TX20201M	Torx T20, 2" Power Bit 1pk	T20	1-15/16"
TX25201M	Torx T25 2" Power Bit 1PK	T25	1-15/16"
TX40201	Torx T40, 2" Power Bit	T40	1-15/16"
TX10601	Torx T10, 6" Bit	T10	6"
TX15601	Torx T15, 6" Bit	T15	6"
TX20601	Torx T20, 6" Bit	T20	6"
TX27601	Torx T27, 6" Bit	T27	6"

Bulk Items

Insert Bits-Extra Hard

Item #	Description	Point	Length
41211	T6 Insert Bit x 1"	T6	1"
37151	T7 Insert Bit x 1"	T7	1"
37153	T8 Insert Bit x 1"	T8	1"
37155	T9 Insert Bit x 1"	T9	1"
37157	T10 Insert Bit x 1"	T10	1"
37159	T15 Insert Bit x 1"	T15	1"
37161	T20 Insert Bit x 1"	T20	1"
37163	T25 Insert Bit x 1"	T25	1"
37165	T27 Insert Bit x 1"	T27	1"
37167	T30 Insert Bit x 1"	T30	1"
37169	T40 Insert Bit x 1"	T40	1"

Insert Bits-Medium Hard

35013	T9 Insert Bit x 1"	T9	1"
45147	T10 Insert Bit x 1"	T10	1"
45148	T15 Insert Bit x 1"	T15	1"
45149	T20 Insert Bit x 1"	T20	1"
45150	T25 Insert Bit x 1"	T25	1"
45468	T27 Insert Bit x 1"	T27	1"
45151	T30 Insert Bit x 1"	T30	1"
45152	T40 Insert Bit x 1"	T40	1"

Insert Bits-Extra Hard-5/16" Hex Shank

37171	T30 Insert Bit Shank Diameter 5/16" x 1-1/4"	T30	1-1/4"
37173	T40 Insert Bit Shank Diameter 5/16" x 1-1/4"	T40	1-1/4"
37175	T45 Insert Bit Shank Diameter 5/16" x 1-1/4"	T45	1-1/4"
37177	T50 Insert Bit Shank Diameter 5/16" x 1-1/4"	T50	1-1/4"
38333	T55 Insert Bit Shank Diameter 5/16" x 1-1/4"	T55	1-1/4"



Toll free: 877-BOSCH-99



BOSCH

Screwdriver Bits

Torx

Torx continued

Bulk Items continued

Power Bits-Extra Hard

Item #	Description	Point	Length
41751	T6 Power Bit x 1- 15/16"	T6	1-15/16"
39931	T7 Power Bit x 1- 15/16"	T7	1-15/16"
37713	T8 Power Bit x 1- 15/16"	T8	1-15/16"
39933	T9 Power Bit x 1- 15/16"	T9	1-15/16"
37715	T10 Power Bit x 1- 15/16"	T10	1-15/16"
37717	T15 Power Bit x 1- 15/16"	T15	1-15/16"
37719	T20 Power Bit x 1- 15/16"	T20	1-15/16"
37721	T25 Power Bit x 1- 15/16"	T25	1-15/16"
37723	T27 Power Bit x 1- 15/16"	T27	1-15/16"
37725	T30 Power Bit x 1- 15/16"	T30	1-15/16"
37727	T40 Power Bit x 1-15/16"	T40	1-15/16"
37729	T8 Power Bit x 2-3/4"	T8	2-3/4"
37731	T10 Power Bit x 2-3/4"	T10	2-3/4"
37733	T15 Power Bit x 2-3/4"	T15	2-3/4"
37735	T20 Power Bit x 2-3/4"	T20	2-3/4"
37737	T25 Power Bit x 2-3/4"	T25	2-3/4"
37741	T30 Power Bit x 2-3/4"	T30	2-3/4"
37743	T40 Power Bit x 2-3/4"	T40	2-3/4"
37745	T8 Power Bit x 3-1/2"	T8	3-1/2"
37747	T10 Power Bit x 3-1/2"	T10	3-1/2"
37749	T15 Power Bit x 3-1/2"	T15	3-1/2"
37751	T20 Power Bit x 3-1/2"	T20	3-1/2"
37753	T25 Power Bit x 3-1/2"	T25	3-1/2"
37755	T27 Power Bit x 3-1/2"	T27	3-1/2"
37757	T30 Power Bit x 3-1/2"	T30	3-1/2"
37759	T40 Power Bit x 3-1/2"	T40	3-1/2"
37763	T10 Power Bit x 6"	T10	6"
37765	T15 Power Bit x 6"	T15	6"
37767	T20 Power Bit x 6"	T20	6"
37769	T25 Power Bit x 6"	T25	6"
37771	T27 Power Bit x 6"	T27	6"
37773	T30 Power Bit x 6"	T30	6"

Pinch Pack

Item #	Description	Point	Length
SQZRT15110	T15 Insert Bit x 1", 10pk	T15	1"
SQZRT20110	T20 Insert Bit x 1", 10pk	T20	1"
SQZRT25110	T25 Insert Bit x 1", 10pk	T25	1"
SQZRT27110	T27 Insert Bit x 1", 10pk	T27	1"
SQZRT30110	T30 Insert Bit x 1", 10pk	T30	1"

Torx Security



Torx Security Insert Bit

Carded Items

Insert Bits

Item #	Description	Point	Length
TXH10102	Security Torx T10H, 1" Insert Bit, 2pk	T10H	1"
TXH15102	Security Torx T15H, 1" Insert Bit, 2pk	T15H	1"
TXH20102	Security Torx T20H, 1" Insert Bit, 2pk	T20H	1"
TXH25102	Security Torx T25H, 1" Insert Bit, 2pk	T25H	1"
TXH27102	Security Torx T27H, 1" Insert Bit, 2pk	T27H	1"
TXH30102	Security Torx T30H, 1" Insert Bit, 2pk	T30H	1"
TXH40102	Security Torx T40H, 1" Insert Bit, 2pk	T40H	1"

Torx Security continued

Bulk Items

Insert Bits-Extra Hard

Item #	Description	Point	Length
38911	Security Torx T7H x 1"	T7H	1"
38338	Security Torx T8H x 1"	T8H	1"
38340	Security Torx T9H x 1"	T9H	1"
38342	Security Torx T10H x 1"	T10H	1"
38344	Security Torx T15H x 1"	T15H	1"
38346	Security Torx T20H x 1"	T20H	1"
38348	Security Torx T25H x 1"	T25H	1"
38350	Security Torx T27H x 1"	T27H	1"
38352	Security Torx T30H x 1"	T30H	1"
38354	Security Torx T40H x 1"	T40H	1"

Torx Align (Wedge)



Torx Align Insert Bit



TORXALIGN Power Bit

Carded Items

Insert Bits

Item #	Description	Point	Length
TX10102G	Torx Align T10, 1" Insert Bit, 2pk	T10W	1"
TX15102G	Torx Align T15, 1" Insert Bit, 2pk	T15W	1"
TX20102G	Torx Align T20, 1" Insert Bit, 2pk	T20W	1"
TX25102G	Torx Align T25, 1" Insert Bit, 2pk	T25W	1"
TX27102G	Torx Align T27, 1" Insert Bit, 2pk	T27W	1"
TX30102G	Torx Align T30, 1" Insert Bit, 2pk	T30W	1"

Bulk Items

Insert Bits

Item #	Description	Point	Length
38763	T6W Insert Bit x 1"	T6W	1"
38765	T7W Insert Bit x 1"	T7W	1"
38767	T8W Insert Bit x 1"	T8W	1"
38769	T9W Insert Bit x 1"	T9W	1"
38771	T10W Insert Bit x 1"	T10W	1"
38365	T15W Insert Bit x 1"	T15W	1"
38367	T20W Insert Bit x 1"	T20W	1"
38369	T25W Insert Bit x 1"	T25W	1"
38371	T27W Insert Bit x 1"	T27W	1"
38373	T30W Insert Bit x 1"	T30W	1"

Power Bits

Item #	Description	Point	Length
38732	T8W Insert Bit x 1-15/16"	T8W	1-15/16"
38734	T9W Insert Bit x 1-15/16"	T9W	1-15/16"
38375	T15W Insert Bit x 1-15/16"	T15W	1-15/16"
38377	T20W Insert Bit x 1-15/16"	T20W	1-15/16"
38379	T25W Insert Bit x 1-15/16"	T25W	1-15/16"
38381	T27W Insert Bit x 1-15/16"	T27W	1-15/16"
38383	T30W Insert Bit x 1-15/16"	T30W	1-15/16"



BOSCH

For more details visit
Boschtools.com

Torx Female Square Drive



Torx Female Square Drive Bit

Bulk Items Square Drive

Item #	Description	Point	Square Drive
38689	Torx Female Square Drive Bit, 1/4", T10	T10	1/4"
38690	Torx Female Square Drive Bit, 1/4", T15	T15	1/4"
38691	Torx Female Square Drive Bit, 1/4", T20	T20	1/4"
38692	Torx Female Square Drive Bit, 1/4", T25	T25	1/4"
38693	Torx Female Square Drive Bit, 1/4", T27	T27	1/4"
38694	Torx Female Square Drive Bit, 1/4", T30	T30	1/4"
38695	Torx Female Square Drive Bit, 3/8", T40	T40	3/8"
38696	Torx Female Square Drive Bit, 3/8", T45	T45	3/8"
40651	Torx Female Square Drive Bit, 3/8", T47	T47	3/8"
38697	Torx Female Square Drive Bit, 3/8", T50	T50	3/8"
38860	Torx Female Square Drive Bit, 3/8", T55	T55	3/8"
44217	Torx Female Square Drive Bit, 1/2", T60	T60	1/2"

Allen



Allen Insert Bit



Allen Power Bit

Allen continued

Bulk Items Insert Bits-Extra Hard

Item #	Description	Point	Length
27094	.050mm Allen Insert Bit x 1"	0.05	1"
27095	1/16" Allen Insert Bit x 1"	1/16"	1"
27096	5/64" Allen Insert Bit x 1"	5/64"	1"
27097	3/32" Allen Insert Bit x 1"	3/32"	1"
37475	7/64" Allen Insert Bit x 1"	7/64"	1"
27098	1/8" Allen Insert Bit x 1"	1/8"	1"
37476	9/64" Allen Insert Bit x 1"	9/64"	1"
27099	5/32" Allen Insert Bit x 1"	5/32"	1"
27100	3/16" Allen Insert Bit x 1"	3/16"	1"
27101	7/32" Allen Insert Bit x 1"	7/32"	1"
27102	1/4" Allen Insert Bit x 1"	1/4"	1"
27103	5/16" Allen Insert Bit x 1"	5/16"	1"
27104	3/8" Allen Insert Bit x 1"	3/8"	1"

Insert Bits-Medium Hard

27096MH	5/64" Allen Insert Bit x 1"	5/64"	1"
27097MH	3/32" Allen Insert Bit x 1"	3/32"	1"
27098MH	1/8" Allen Insert Bit x 1"	1/8"	1"
27099MH	5/32" Allen Insert Bit x 1"	5/32"	1"
27100MH	3/16" Allen Insert Bit x 1"	3/16"	1"
27101MH	7/32" Allen Insert Bit x 1"	7/32"	1"
27102MH	1/4" Allen Insert Bit x 1"	1/4"	1"
37475MH	7/64" Allen Insert Bit x 1"	7/64"	1"
37476MH	9/64" Allen Insert Bit x 1"	9/64"	1"

Insert Bits-Extra Hard for Metric Socket Head Screw

36538	2mm Allen Insert Bit x 1"	2MM	1"
36539	3mm Allen Insert Bit x 1"	3MM	1"
36540	4mm Allen Insert Bit x 1"	4MM	1"
36541	5mm Allen Insert Bit x 1"	5MM	1"
36542	6mm Allen Insert Bit x 1"	6MM	1"

Power Insert

27420	1/16" Allen Power Bit x 1- 15/16"	1/16"	1-15/16"
27421	5/64" Allen Power Bit x 1- 15/16"	5/64"	1-15/16"
27422	3/32" Allen Power Bit x 1- 15/16"	3/32"	1-15/16"
37563	7/64" Allen Power Bit x 1- 15/16"	7/64"	1-15/16"
27423	1/8" Allen Power Bit x 1- 15/16"	1/8"	1-15/16"
37565	9/64" Allen Power Bit x 1- 15/16"	9/64"	1-15/16"
27424	5/32" Allen Power Bit x 1- 15/16"	5/32"	1-15/16"
27425	3/16" Allen Power Bit x 1- 15/16"	3/16"	1-15/16"
27427	1/4" Allen Power Bit x 1- 15/16"	1/4"	1-15/16"

Carded Items

Insert Bits

Item #	Description	Point	Length
AL564102	Allen B 5/64, 1" Insert Bit, 2pk	5/64"	1"
AL332102	Allen B 3/32, 1" Insert Bit, 2pk	3/32"	1"
AL764102	Allen B 7/64, 1" Insert Bit, 2pk	7/64"	1"
AL181102	Allen B 1/8, 1" Insert Bit, 2pk	1/8"	1"
AL964102	Allen B 9/64, 1" Insert Bit, 2pk	9/64"	1"
AL532102	Allen B 5/32, 1" Insert Bit, 2pk	5/32"	1"
AL316102	Allen B 3/16, 1" Insert Bit, 2pk	3/16"	1"
AL732102	Allen B 7/32, 1" Insert Bit, 2pk	7/32"	1"
AL141102	Allen B 1/4, 1" Insert Bit, 2pk	1/4"	1"
AL516102	Allen B 5/16, 1" Insert Bit, 2pk	5/16"	1"



Screwdriver Bits

Allen/Pozidrive/Torq-set/Tri-wing®

Allen Security



Allen Security Insert Bit

Carded Items

Insert Bits

Item #	Description	Point	Length
35693	1/8" Allen Security x 1"	1/8"	1"
35694	9/64" Allen Security x 1"	9/64"	1"
35695	5/32" Allen Security x 1"	5/32"	1"
35696	3/16" Allen Security x 1"	3/16"	1"
35697	7/32" Allen Security x 1"	7/32"	1"
35698	1/4" Allen Security x 1"	1/4"	1"
35699	5/16" Allen Security x 1"	5/16"	1"
35701	3/8" Allen Security x 1"	3/8"	1"

Pozidrive



Pozidriv Insert Bit



Pozidriv Power Bit

Carded Items

Insert Bits

Item #	Description	Point	Length
PZD1102	Carded Pozidrive #PZ1 1" Insert Bit 2pk	PZ1	1"
PZD1102R	Carded Pozidrive #PZ1 1" Ribbed Insert Bit 2pk	PZ1	1"
PZD2102	Carded Pozidrive #PZ2, 1" Insert Bit 2pk	PZ2	1"
PZD2102R	Carded Pozidrive #PZ2, 1" Ribbed Insert Bit 2pk	PZ2	1"
PZD2R102	Carded Pozidrive #PZ2R, 1" Insert Bit 2pk	PZ2R	1"
PZD3102	Carded Pozidrive #PZ3, 1" Insert Bit 2pk	PZ3	1"
PZD3102R	Carded Pozidrive #PZ3, 1" Ribbed Insert Bit	PZ3	1"

Bulk Items

Insert Bits-Extra Hard

Item #	Description	Point	Length
27045	#1 Pozidriv Insert Bit x 1"	PZ1	1"
27046	#2 Pozidriv Insert Bit x 1"	PZ2	1"
27047	#3 Pozidriv Insert Bit x 1"	PZ3	1"

Insert Bits-Medium Hard

Item #	Description	Point	Length
45153	#1 Pozidriv Insert Bit x 1"	PZ1	1"
45154	#2 Pozidriv Insert Bit x 1"	PZ2	1"
45939	#3 Pozidriv Insert Bit x 1"	PZ3	1"

Power Bits

Item #	Description	Point	Length
27380	#1 Pozidriv Power Bit - 2"	PZ1	2"
27381	#2 Pozidriv Power Bit - 2"	PZ2	2"
27382	#3 Pozidriv Power Bit - 2"	PZ3	2"
27386	#1 Pozidriv Power Bit - 3-1/2"	PZ1	3-1/2"
27387	#2 Pozidriv Power Bit - 3-1/2"	PZ2	3-1/2"
27388	#3 Pozidriv Power Bit - 3-1/2"	PZ3	3-1/2"
27389	#1 Pozidriv Power Bit - 6"	PZ1	6"
27390	#2 Pozidriv Power Bit - 6"	PZ2	6"
27391	#3 Pozidriv Power Bit - 6"	PZ3	6"

Torq-set



Torq-set Insert Bit



Torq-set Power Bit

Carded Items

Insert Bits

Item #	Description	Point	Length
35395	#0 TORQ-SET Insert Bit x 1"	#0	1"
35396	#1 TORQ-SET Insert Bit x 1"	#1	1"
35397	#2 TORQ-SET Insert Bit x 1"	#2	1"
35398	#3 TORQ-SET Insert Bit x 1"	#3	1"
35399	#4 TORQ-SET Insert Bit x 1"	#4	1"
35394	#5 TORQ-SET Insert Bit x 1"	#5	1"
35401	#6 TORQ-SET Insert Bit x 1"	#6	1"
35402	#8 TORQ-SET Insert Bit x 1"	#8	1"
35403	#10 TORQ-SET Insert Bit x 1"	#10	1"

Power Bits

Item #	Description	Point	Length
35425	#0 TORQ-SET Power Bit x 1-1/4"	#0	1-1/4"
35426	#1 TORQ-SET Power Bit x 1-1/4"	#1	1-1/4"
35427	#2 TORQ-SET Power Bit x 1-1/4"	#2	1-1/4"
35428	#3 TORQ-SET Power Bit x 1-1/4"	#3	1-1/4"
35429	#4 TORQ-SET Power Bit x 1-1/4"	#4	1-1/4"
35430	#5 TORQ-SET Power Bit x 1-1/4"	#5	1-1/4"
35431	#6 TORQ-SET Power Bit x 1-1/4"	#6	1-1/4"
35432	#8 TORQ-SET Power Bit x 1-1/4"	#8	1-1/4"
35433	#10 TORQ-SET Power Bit x 1-1/4"	#10	1-1/4"

Tri-wing®



Tri-wing Insert Bit

Bulk Items

Insert Bits

Item #	Description	Point	Length
35410	#1 TRI-WING Insert Bit x 1"	#1	1"
35411	#2 TRI-WING Insert Bit x 1"	#2	1"
35412	#3 TRI-WING Insert Bit x 1"	#3	1"
35413	#4 TRI-WING Insert Bit x 1"	#4	1"
35414	#5 TRI-WING Insert Bit x 1"	#5	1"



BOSCH



For more details visit
Boschtools.com

Screwdriver Bits

Spanner/Clutch/Frearson/Nutsetters

211

Spanner



Spanner Insert Bit

Carded Items

Insert Bits

Item #	Description	Point	Length
SPA6102	Spanner #6 Gold Bit, 2pk	#6	1"
SPA802	Spanner #8 Gold Bit, 2pk	#8	1"
SPA10102	Spanner #10 Gold Bit, 2pk	#10	1"

Bulk Items

Insert Bits

Item #	Description	Point	Length
35422	Spanner #6 Insert Bit x 1"	#6	1"
35423	Spanner #8 Insert Bit x 1"	#8	1"
35424	Spanner #10 Insert Bit x 1"	#10	1"

Clutch



Clutch Insert Bit

Carded Items

Insert Bits-Type "G"

Item #	Description	Point	Length
CL3102	Clutch C3, 1" Insert Bit, 2pk	C3	1"
CL4102	Clutch C4, 1" Insert Bit, 2pk	C4	1"

Bulk Items

Insert Bits-Type "G"

Item #	Description	Point	Length
27081	1/8" Clutch Type C2 Insert Bit x 1"	C2	1"
27082	5/32" Clutch Type G Insert Bit x 1"	C3	1"
27083	3/16" Clutch Type G Insert Bit x 1"	C4	1"
27437	5/32" Clutch Type G Power Bit x 1- 15/16"	C3	1-15/16"

Frearson



Frearson Insert Bit

Bulk Items

Square Drive

Item #	Description	Point	Length
FR2102	Frearson F2, 1" Insert Bit, 2pk	F2	1"

Bulk Items

Square Drive

Item #	Description	Point	Length
27070	Frearson F1, 1" Insert Bit	F1	1"
37382	Frearson F2, 1" Insert Bit	F2	1"


Nutsetters


Nutsetter
(No power groove)


Nutsetter Magnetic



Power No-Round Nutsetter


Superior Grip -
Contact point
at middle of hex

Carded Items

Nutsetters

Item #	Description	Point	Length
NS316101	Nutsetter 3/16" Black Hex	3/16"	1.3"
NS141401MAG	Nutsetter 1/4" Black Hex Magnetic	1/4"	1.125"
NS141401	Nutsetter 1/4" Black Hex	1/4"	1.4"
NS11401	Nutsetter 1/4" No-Round	1/4"	1.675"
NS14201	Nutsetter 1/4" Power Magnetic	1/4"	2"
NS1429601	Nutsetter 1/4" Power Magnetic	1/4"	2.562"
NS516101MAG	Nutsetter 5/16" Black Hex Magnetic	5/16"	1.125"
ND5161401	Nutsetter 5/16" Black Hex	5/16"	1.44"
NS51601	Nutsetter 5/16" No-Round	5/16"	1.675"
NS51629601	Nutsetter 5/16" Power Magnetic	5/16"	2.562"
NS381401MAG	Nutsetter 3/8" Black Hex Magnetic	3/8"	1.25"
ND31601	Nutsetter 3/8" Black Hex	3/8"	1.47"
NS3801	Nutsetter 3/8" No-Round	3/8"	1.86"
NS381401	Nutsetter 3/8" Power Non Magnetic	3/8"	1.875"
NS3829601	Nutsetter 3/8" Power Magnetic	3/8"	2.562"
NS716201MAG	Nutsetter 7/16" Power Magnetic	7/16"	2"
NS71629601	Nutsetter 7/16" Power Magnetic	7/16"	2.562"



Toll free: 877-BOSCH-99



BOSCH

Screwdriver Bits

Nutsetters/Bit Holders/Double Ended

Nutsetters continued

Bulk Items

Nutsetters Insert-Magnetic (No Power Groove)

Item #	Description	Point	Length
38686	1/8" Mag. Nutsetter 1-1/8"	1/8"	1-1/8"
38687	5/16" Mag. Nutsetter 1-1/8"	5/16"	1-1/8"
38688	3/8" Mag. Nutsetter 1-1/8"	3/8"	1-1/8"

Nutsetters Non-Magnetic

29090	1/4" Nutsetter, 1-5/8"	1/4"	1-5/8"
29091	5/16" Nutsetter, 1-5/8"	5/16"	1-5/8"
36166	3/8" Nutsetter x 1-7/8"	3/8"	1-7/8"
37585	1/4" Nutsetter x 2-9/16"	1/4"	2-9/16"

Nutsetters-Magnetic

31450	1/4" Mag. Nutsetter 1-5/8"	1/4"	1-5/8"
31452	5/16" Mag. Nutsetter 1-5/8"	5/16"	1-5/8"
36165	3/8" Mag. Nutsetter 1-7/8"	3/8"	1-7/8"
37893	7/16" Mag. Nutsetter 2"	7/16"	2"
37427	1/4" Nutsetter x 2" (tapered)	1/4"	2"
37582	1/4" Mag. Nutsetter 2-9/16"	1/4"	2-9/16"
37583	5/16" Mag. Nutsetter 2-9/16"	5/16"	2-9/16"
37584	3/8" Mag. Nutsetter 2-9/16"	3/8"	2-9/16"
38639	7/16" Mag. Nutsetter 2-9/16"	7/16"	2-9/16"
38641	1/4" Mag. Nutsetter x 4"	1/4"	4"
38642	5/16" Mag. Nutsetter x 4"	5/16"	4"
38645	1/4" Mag. Nutsetter x 6"	1/4"	6"
38646	5/16" Mag. Nutsetter x 6"	5/16"	6"

Nutsetters-Magnetic-No Round

61938	1/4" NO-ROUND Nutsetter x 1-5/8"	1/4"	1-5/8"
61939	5/16" NO-ROUND Nutsetter x 1-5/8"	5/16"	1-5/8"
61940	3/8" NO-ROUND Nutsetter x 1-7/8"	3/8"	1-7/8"
61941	7/16" NO-ROUND Nutsetter x 2"	7/16"	2"
61942	1/4" NO-ROUND Nutsetter x 2" (tapered)	1/4"	2"
61943	1/4" NO-ROUND Nutsetter x 2-9/16"	1/4"	2-9/16"
61944	5/16" NO-ROUND Nutsetter x 2-9/16"	5/16"	2-9/16"
61945	3/8" NO-ROUND Nutsetter x 2-9/16"	3/8"	2-9/16"
61946	7/16" NO-ROUND Nutsetter x 2-9/16"	7/16"	2-9/16"

Nutsetters-Metric Sizes

38328	8mm Nutsetter x 1-5/8"	8MM	1-5/8"
38329	10mm Mag. Nutsetter x 1-7/8"	10MM	1-7/8"

Bit Holders



Female Square Drive



One Piece Construction



Male Square Drive



Insert Drive Style



Screw Cap

Carded Items

Bit Holders

Item #	Description	Point	Length
BMAG1	Mag Grip Holder	-	-
39625	Finder Driver Slotted, #5-6	#5-6	-
39626	Finder Driver Slotted, #6-8	#6-8	-
39627	Finder Driver Slotted, #8-10	#8-10	-
39628	Finder Driver Slotted, #10-12	#10-12	-
CC60482	2" Magnetic Bit Tip Holder	-	2"
CC60491	Compact Drive Guide	-	3-1/4"
CC60486	6" Magnetic Bit Tip Holder	-	6"

Bit Holders continued

Bulk Items

Bit Holder-C-Ring Retainer

Item #	Description	Point	Length
27690	Standard With C-Ring 2-7/8"	1/4"	2-7/8"
27710	Standard With C-Ring 4"	1/4"	4"
27730	Standard With C-Ring 5"	1/4"	5"
27750	Standard With C-Ring 6"	1/4"	6"
27792	Standard With C-Ring 12"	1/4"	12"

Bit Holders-One-Piece Construction

38215	One Piece Construction Non-Magnetic Bit Holder	1/4"	2-1/8"
40831	One Piece Construction Magnetic Bit Holder	1/4"	2-1/8"
40833	One Piece Construction Magnetic Bit Holder	1/4"	2-31/32"
39972	One Piece Construction Magnetic Bit Holder (w/o C-Ring Retainer)	1/4"	2-7/8"

Bit Holders-for Helix Insert Bits(Silicon Bronze)

38310	Two Piece Magnetic Bit Holder W/ Screw Cap (Silicon Bronze)	1/4"	3"
-------	---	------	----

Bit Holders-Screw Cap Style

26790	Screw Cap Style Bit Holder, Magnetic	1/4"	2-7/8"
26791	Screw Cap Style Bit Holder, Magnetic	1/4"	2-3/16"

Specialty Bit Holders-Male Square Drive for Sockets

34609	1/4" Square Drive Square Drive Socket Adapter x 1-1/8"		1-1/8"
34610	1/4" Square Drive Square Drive Socket Adapter x 2"	1/4"	2"
34611	3/8" Square Drive Square Drive Socket Adapter x 2"	3/8"	2"

Specialty Bit Holders-Female Square Drive for Sockets

31894	1/4" Square Drive Bit Holder x 1-1/8" for 1/4" hex bits	1/4"	1-1/8"
31895	3/8" Square Drive Bit Holder x 1-1/8" for 1/4" hex bits	3/8"	1-1/8"
31896	3/8" Square Drive Bit Holder x 1-3/8" for 5/16" hex bits	3/8"	1-3/8"
31897	1/2" Square Drive Bit Holder x 1-7/16" for 5/16" hex bits	1/2"	1-7/16"

Screw Guides

Item #	Description	Point	Length
49417	Compact Magnetic Screw Guide - 3-1/16"	1/4"	3-1/16"
49415	Standard Magnetic Screw Guide - 4-11/16"	1/4"	4-11/16"

Double Ended



Phillips



Phillips/Slotted

Carded Items

Double End Bits

Item #	Description	Point	Length
DEBP16201R	Double Ended P1 - 6 Rib 2" ScrwDrv Bit	P1-S6	1.88"
DEBP28201	Double Ended P2-8 2" Scrw Drv Bit	P2-S8	1.88"
DEBP310201	Double Ended P3 -10 2" Scrw Drv Bit	P3-S10	1.88"
DEBP162501	Double Ended P1-6 2-1/2" Scrw Drv Bit	P1-S6	2-1/2"
DEBP282501	Double Ended P2-8 2-1/2" Scrw Drv Bit	P2-S8	2-1/2"
DEBP282501R	Double Ended P2-8 2-1/2" Rib Scrw Drv Bit	P2-S8	2-1/2"
DEBP3102501R	Double Ended P3-10 2-1/2" Rib Scrw Drv Bit	P3-S10	2-1/2"
DEBP1P22501	Double Ended P1-P2 2-1/2" Scrw Drv Bit	P1-P2	2-1/2"
DEBP222501	Double Ended P2-P2 2-1/2" Scrw drv Bit	P2-P2	2-1/2"
DEBP2R22501R	Double Ended P2-R2 2-1/2" Rib Scrw Drv Bit	P2-R2	2-1/2"
DEBR122501	Double Ended R1-R2 2-1/2" Scrw Drv Bit	R1-R2	2-1/2"
DEBR232501	Double Ended R2-R3 2-1/2" Scrw Drv Bit	R2-R3	2-1/2"
DEBT15202501	Double Ended T15-T20 2-1/2" Scrw Drv bit	T15-T20	2-1/2"
DEBT2530101	Double Ended T25-T30 1-1/2" Scrw Drv Bit	T25-T30	1-1/2"
DEBP163501	Double Ended P1-6 Rib 3-1/2" Scrw Drv Bit	P1-S6	-
DEBP283501R	Double Ended P2-8 3-1/2" Rib Scrw Drv Bit	P2-S8	-


BOSCH

For more details visit
Boschtools.com

Screwdriver Bits

Double Ended/Titanium

213

Double Ended continued

Bulk Items			
Double End Bits			
Item #	Description	Point	Length
38655	Double Ended Bit P2-R2	P2-R2	2-1/2"
48784	Double Ended Bit R1-R2	R1-R2	2"
38666	Double Ended Bit P1-#6 Slotted	P1-#6	1-1/2"
38652	Double Ended Bit P2-#8 Slotted	P2-#8	1-1/2"
38657	Double Ended Bit P2-#8 Slotted	P2-#8	2-1/2"
38653	Double Ended Bit P3-#10 Slotted	P3-#10	1-1/2"
42078	Double Ended Torx Bit T15-T20	T15-T20	1-1/2"
42079	Double Ended Torx Bit T25-T30	T25-T30	1-1/2"

Bulk Items continued			
Double End Bits Phillips with Power Grove			
Item #	Description	Point	Length
44103	Double Ended Phillips Bit P2-P2 1-3/4"	P2-P2	1-3/4"
44071	Double Ended Phillips Bit P2-P2 2-1/2"	P2-P2	2-1/2"
Bit and Finder Driver			
39625	#5-6 Slotted Finder	#5-6	3-3/4"
39626	#6-8 Slotted Finder	#6-8	3-3/4"
39627	#8-10 Slotted Finder	#8-10	3-3/4"
39628	#10-12 Slotted Finder	#10-12	3-3/4"

Drywall



D60498	D60498 Dimpler
DWS60497	Drywall Screw Setter, #2 Phillips

Dimpler
ScrewSetter


Titanium Bits

Titanium Coating 75% more gripping power reduces stripping

The Titanium tough grip screwdriver bits significantly reduces slippage (camout) and the need to replace bits as often as standard screw driver bits. The bits start with a rough surface that actually grips the entire inside dimension of the screw head with millions of gripping points. The bits are then coated with Titanium to provide a hard surface that protects the gripping points. Aggressive gripping power



Closeup of titanium tough grip coating

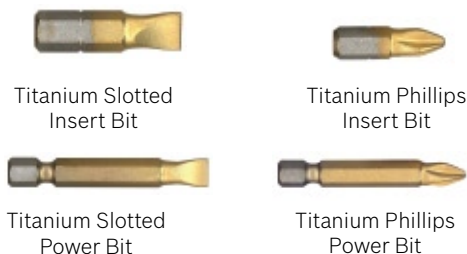

Carded Items			
Phillips® Insert Bits			
Item #	Description	Point	Length
TDP1102	Phillips #P1, 1" Titanium, 2pk	P1	1"
TDP2102	Phillips #P2, 1" Titanium, 2pk	P2	1"
TDP2106	Phillips #P2, 1", Titanium 6 pk	P2	1"
TDP2108	Phillips #P2, 1", Titanium 8 pk	P2	1"
TDP2110	Phillips #P2, 1" Titanium, 10pk	P2	1"
TDP3102	Phillips #P3, 1" Titanium, 2pk	P3	1"
TDP123103	Phillips #P1, #P2, #P3, 1" Titanium, 3pk	P1, P2, P3	1"
BCLIP15	Phillips #P2, 1" Titanium Ammo Clip 15pk	P2	1"
TDP210250	Phillips #P2, 1" Titanium Cookie Jar, 250 pcs	P2	1"

Carded Items continued			
Power Insert Bits			
Item #	Description	Point	Length
TDP1201	Phillips #P1, 2" Titanium	P1	2"
TDP2201	Phillips #P2, 2" Titanium, 2pk	P2	2"
TDP2203	Phillips #P2, 2", Titanium 3pk	P2	2"
TDP2205	Phillips #P2, 2", Titanium 5pk	P2	2"
TDP3201	Phillips #P3, 2" Titanium, 1pk	P3	2"
TDP123203	Phillips #P1, #P2, #P3 2" Titanium, 3pk	P1, P2, P3	2"
Square Drive Insert Bits			
TDR2102	Phillips #R2, 1" Titanium, 2pk	R2	1"
TDR2106	Square #R2 Titanium 1" 6pk	R2	1"
Square Drive Power Insert Bits			
TDR2203	Square #R2 Titanium 2" 3pk	R2	2"
Slotted Insert Bits			
TDSL68102	Slotted 6-8, 1" Titanium, 2pk	6-8	1"
TDSL810102	Slotted 8-10, 1" Titanium, 2pk	8-10	1"
TDSL1012102	Slotted 10-12, 1" Titanium, 2pk	10-12	1"
Slotted Power Bits			
TDSL68201	Slotted 6-8, 2" Titanium	6-8	2"
TDSL810201	Slotted 8-10, 2" Titanium	8-10	2"
TDSL1012201	Slotted 10-12, 2" Titanium	10-12	2"
TDSL68101220	Slotted 6-8, 8-10, 10-12, 2" Titanium, 3pk	6-8, 8-10, 10-12	2"

Drills and Fastening



Screwdriver Bits

Clic-Change™ Bit System/Mixed Sets & Accessories

Clic-Change™ Bit System

Clic-Change™ Bit System

This quick change bit system features true one-handed load and release and is up to 33% faster than competitive systems. The superior accuracy of the patent-pending mechanism virtually eliminates looseness and wobble. To load, simply push bit into chuck. To release, pull forward on the collar and remove.

- Change bits without re-chucking. Switch from bit to bit quickly
- Fits all 3/8" and 1/2" drills
- Accepts all 1/4" power hex shank accessories including insert bits, nutsetters and sockets

Item #	Description	Quantity
CC2100	5 Pc. Chuck Adapter and Bits	5 Pc. Set
CC2110	8 Pc. Chuck & Drill Bit Set	8 Pc. Set
CC2120	10 Pc. Drill & Driver Bit Set	10 Pc. Set
CC2130	27 Pc. Drill & Driver Bit Set	27 Pc. Set
CC2201	1/16" Drill Bit	1
CC2203	3/32" Drill Bit	1
CC2205	1/8" Drill Bit	1
CC2207	5/32" Drill Bit	1
CC2209	3/16" Drill Bit	1
CC2211	7/32" Drill Bit	1
CC2213	1/4" Drill Bit	1
CC2221	1/8" Masonry Bit	1
CC2223	5/32" Masonry Bit	1
CC2225	3/16" Masonry Bit	1
CC2227	1/4" Masonry Bit	1
CC2244	#6 Adjustable Countersink	1
CC2246	#8 Adjustable Countersink	1
CC2248	#10 Adjustable Countersink	1
CC2253	#6 Self-Centering Bit	1

Item #	Description	Quantity
CC2255	#8 Self-Centering Bit	1
CC2257	#10 Self-Centering Bit	1
CC2260	Starter/Driver	1
CC2271	1/4" Magnetic Nutsetter	1
CC2273	5/16" Magnetic Nutsetter	1
CC2275	3/8" Magnetic Nutsetter	1
CC2400	5 Pc. Drill Bit Set	5 Pc. Set
CC2410	4 Pc. Masonry Bit Set	4 Pc. Set
CC2420	4 Pc. Spade Bit Set	4 Pc. Set
CC2430	3 Pc. Self-Centering Bit Set	3 Pc. Set
CC2460	7 Pc. Countersinking Set	7 Pc. Set
CC2470	12 Pc. Starter/Driver Bit Set	12 Pc. Set
CC2480	12 Pc. Screwdriver Bit Set	12 Pc. Set
CC2490	3 Pc. Magnetic Nutsetter Set	3 Pc. Set
CC60467	2PC Double Ended Bit Set 3-1/2"	2 Pc. Set
CC60464	3PC Double Ended Bit Set 2"	3 Pc. Set
CC90396	6pc Torx Bit Set	6 Pc. Set
CC60392	7 Pc. Allen Bit Set	7 Pc. Set

Screwdriving & Mixed Sets



SBID9

Set Includes:
Phillips 2": #2
Square 2": R2
Slotted 2": 6-8, 8-10
Nut Setter: 1/4", 5/16", 3/8"
Hex Shank Drill Bit: 1/16", 1/8"



41786

Set Includes:
Phillips 1": 0, 1, 2, 3
POZIDRIV 1": PZ1, PZ2
Square 1": R0, R1, R2, R3
TORX 1": T10, T15, T20, T25, T27, T30, T40
Allen 1": 5/64", 3/32", 7/64", 1/8", 9/64"
Slotted 1": 0-1, 3-4, 5-6, 8-10, 12-14
7" Handy Driver
Socket Adaptor 1/4" x 1"
Magnetic Bitholder One Piece 1-3/4" SS

48240

Set Includes:
TORX Security 1": T9H, T10H, T15H, T20H, T25H, T27H, T30H, T40H
POZIDRIV 1": PZ2
Square 1": R1, R2
TORX-SET 1": #5, #8
TRI-WING 1": #4, #5
Spanner 1": #6, #8, #10
Allen Security 1": 1/8", 9/64", 5/32", 3/16", 7/32", 1/4", 5/16", 3/8"
7" Handy Driver
Socket Adaptor 1/4" x 1"
Magnetic Bitholder One Piece 1-3/4" SS



T4042

Set Includes:
Phillips 1": 1, 2, 3
Slotted 1": 6-8, 8-10, 10-12
Square 1": R1, R2
Phillips 2": 1, 2, 3
Square 2": R2
Slotted 2": 6-8, 8-10
Nut Setter: 1/4", 5/16"
Bosch Finder Driver



T4047

Set Includes:
Phillips Titanium 1": #2
Phillips 1": 1, 2, 3
Slotted 1": 6-8, 8-10, 10-12
TORX 1": T15, T20, T25
Square 1": R1, R2, R3
Phillips 2": #2
Square 2": R2
Slotted 2": 8-10
Nut Setter: 1/4", 5/16"
Bosch Finder Driver



42826

Set Includes:
Phillips 1": 0, 1, 2, 3
POZIDRIV 1": PZ1, PZ2
Square 1": R0, R1, R2, R3
TORX 1": T10, T15, T20, T25, T27, T30, T40
Allen 1": 5/64", 3/32", 7/64", 1/8", 9/64", 5/32", 3/16", 7/32", 1/4", 2.5mm, 3mm, 4mm, 5mm, 6mm
Slotted 1": 0-1, 3-4, 5-6, 8-10, 12-14
Clutch 1"
7" Handy Driver Socket Adaptor 1/4" x 1"
Magnetic Bitholder One Piece 1-3/4" SS



T4021

Set Includes:
Phillips 1": #2
Slotted 1": 6-8, 8-10, 10-12
Square 1": R2
Phillips 2": #2
Square 2": R2



T4039

Set Includes:
Titanium Drill Bits: (2) 1/16", 5/64", 3/32", 7/64", (2) 1/8", 9/64", 5/32", 11/64", 3/16", 7/32", 1/4"
Daredevil Spade Bits 1/2", 3/4", 1"
Bosch Finder Driver
P2+R2 Combo Bit 1"
Phillips 1": 1, 2, 3
Square 1": 1, 2, 3
Slotted 1": 6-8, 8-10, 10-12
TORX 1": T15, T20, T25
Nutsetters: 1/4", 5/16"


BOSCH

For more details visit
Boschtools.com